



Anchor, Tough One, 8in, 15,000 ft-lb rating, 2.5in hub,1in threads.


by TTF POWER TECHNOLOGY CO.,LTD

Catalog ID: ATO001

Tough One Anchor Helix, 15,000 Ft Lbs (20,340 N-M), 8" (203 mm) Helix for use with 0.75" (19.1 mm) or 1" (25.4 mm) Rod.

Tough One anchors give users high-strength anchor capability in all soils. You get a better anchor at an economical price. The anchor's sloped lead point improves penetration and helps soil flow from below the hub to above the anchor. The system consists of a screw anchor, anchor rod and installation tooling.

- The anchor's sloped lead point improves penetration and helps soil flow from below the hub to above the anchor.
- 1" threads to fit 3/4" and 1" diameter Pisa rod
- Anchors are painted with a black paint

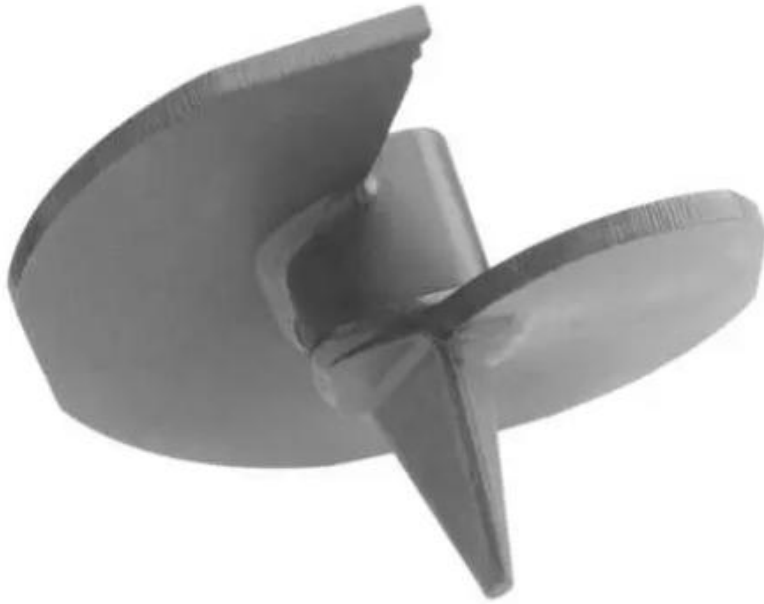

PRODUCTS DETAILS

General

Application	Helical Anchoring
Coating	Painted
Torque Rating	15000 ft-lbs
Type	Anchor Helix

Dimensions

Anchor Helix Diameter(s)	8 in / 203 mm
Anchor Hub Size	2.500 in / 64 mm
Rod Diameter	0.750 in / 19 mm 1.000 in / 25.4 mm
Weight	11.437 lb / 5.191 kg

Logistics

Pallet Quantity	192 EA
Standard Package	4

For further technical assistance, please contact us

TTF POWER TECHNOLOGY CO. , LTD

Rm. 609-610 Tianjin Technology Financial Building, Tianjin, China, 300384

Phone: +86-22-85233528

Mobile: +86-15510864645

Email: ttfintlcs@ttfpower.com