


CATALOG NUMBER : 01A0X5W

APPLICATION RANGE	STRAND SIZE & CONSTRUCTION	MAXIMUN RBS	DIM A	DIM B	DIM C
0.361 TO 0.384 [9.17 TO 9.75]	14M	14000 [62.3]	31.00 [787.40]	28.8 [655]	1.063 [27.00]

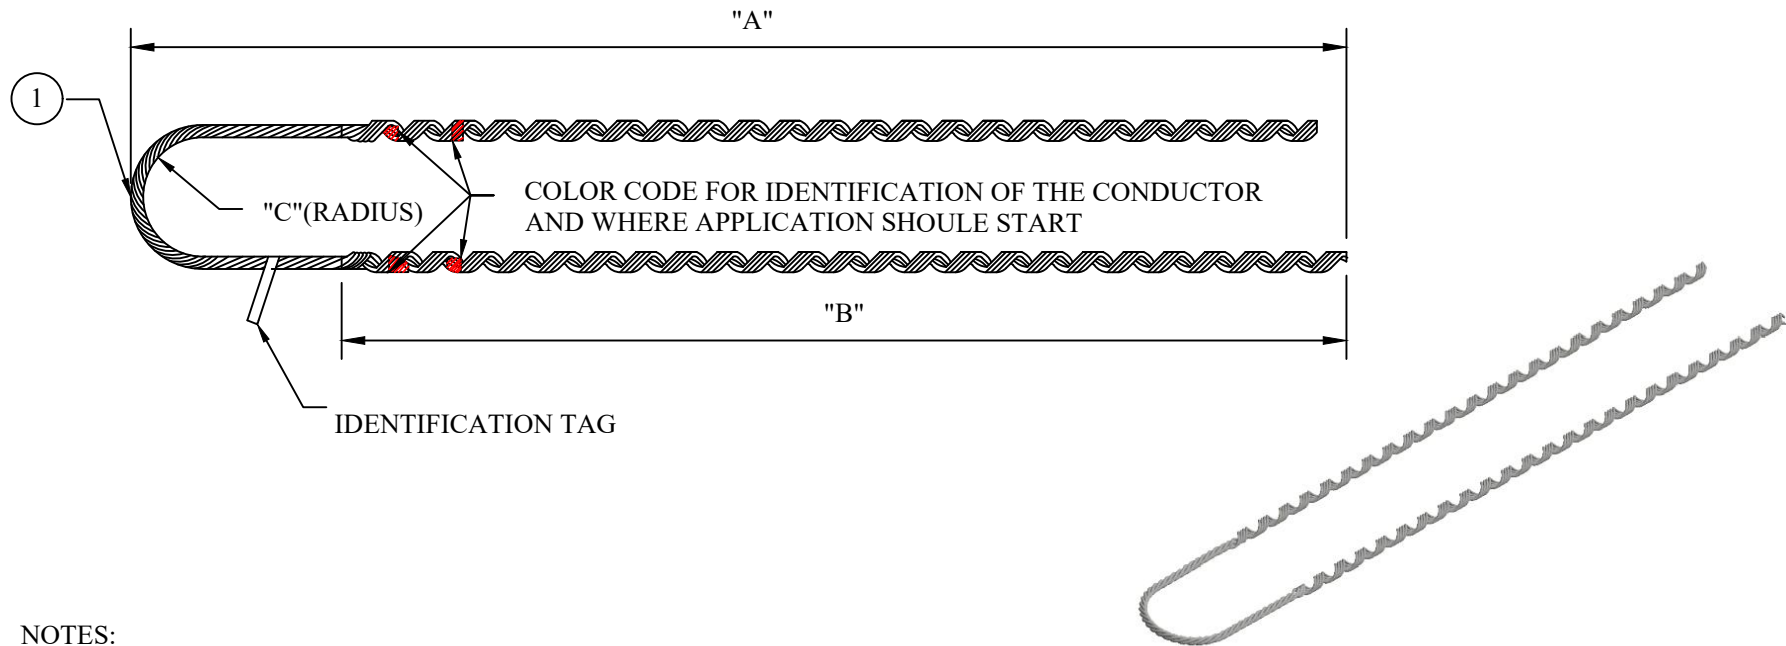

NOTES:

1. ALL DIMENSIONS FOR REFERENCE ONLY. SIDTANCE. [MM], FORCE LBS. [kN], TORQUE IN. LBS. [N.m], & WEIGHT LBS. [KG].

2. RATINGS:

A. ALL GUY WIRE DEAD-ENDS MEET 100% OF THE WIRE RATED BREAKING STRENGTH(RBS) AS SHOWN IN TABLE

3. CERTIFICATIONS, SPECIFICATIONS, & STANDARDS:

A. NA

4. SUFFIXS & VARIANT CONFIGURATION

A. NA

5. HAND LAY DIRECTION: LEFT

DRN BY:	DATA
DYJ	08/08/16
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

ALUMINUM CLAD STEEL FORMED WIRE DEADEND



TTF POWER TECHNOLOGY CO.