


CATALOG NUMBER : 01A1R9H

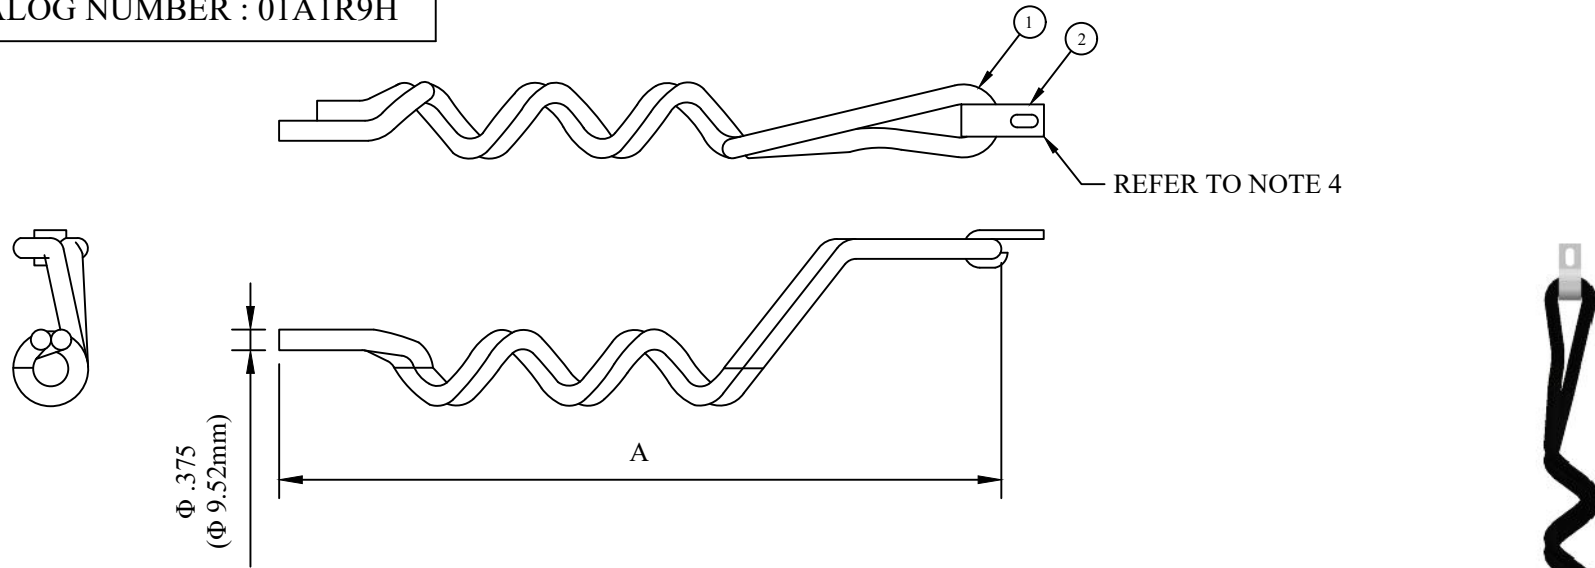

**NOTES:**

1. ALL DIMENSIONS FOR REFERENCE ONLY. DISTANCE IN. [MM], FORCE LBS. [KN], TORQUE IN. LBS. [N.M], & WEIGHT LBS. [KG].
2. RATINGS:  
A. V-0 FLAMMABILITY RATING PER UL 94
3. CERTIFICATIONS, SPECIFICATIONS. & STANDARDS:  
A. UV STABILIZED - MIN. 2.5% CARBON BLACK FILLED BY WEIGHT
4. SUFFIX & VARIANT CONFIGURATION:  
"8" - FOR ALUMINUM MOUNTING BRACKET  
"N" - FOR NEOPRENE INSERT

CATALOG NUMBER	CABLE RANGE MIN. - MAX.	DIM. "A"	WEIGHT LBS. [KG]	STANDARD PACK
01A1R9H_1	0.250 - 0.400 [6.35] - [10.16]	14 [355.60]	.210 [.10]	100
01A1R9H_2	0.400 - 0.560 [10.16] - [14.22]	14 [355.60]	.220 [.10]	100
01A1R9H_3	0.560 - 0.720 [14.22] - [18.29]	14 [355.60]	.230 [.10]	100
01A1R9H_4	0.720 - 0.920 [18.29] - [23.37]	14 [355.60]	.280 [.13]	25
01A1R9H_5	0.920 - 1.130 [23.37] - [28.70]	14 [355.60]	.310 [.14]	25
01A1R9H_6	1.130 - 1.500 [28.70] - [38.10]	15 [381.00]	.340 [.15]	25
01A1R9H_7	1.500 - 1.800 [38.10] - [45.72]	16 [406.40]	.370 [.17]	25
01A1R9H_8	1.810 - 2.100 [45.97] - [53.34]	16 [406.40]	.380 [.17]	100
01A1R9H_9	2.000 - 2.600 [50.80] - [66.04]	16 [406.40]	.390 [.17]	25
01A1R9H_10	2.500 - 3.100 [63.50] - [78.74]	17 [431.80]	.570 [.26]	50
01A1R9H_11	3.000 - 3.600 [76.20] - [91.44]	17 [431.80]	.710 [.32]	50

DRN BY:	DATA
Ella	10/10/16
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	



TTF POWER TECHNOLOGY CO.

CABLE RISER TIE