
CATALOG NUMBER: 01A9U6M

APPLICATION RANGE	STRAND SIZE	STRAND CONSTRUCTION	MAXIMUN RBS	A	В	С
0.475 TO 0.515 [12.065 TO 13.081]	1/2	7W 9W	26900	49 [1244.6]	1 [25.4]	1.875 [47.6]

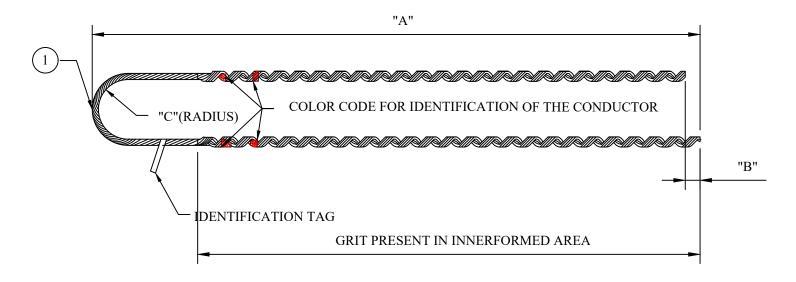

NOTES:

1.ALL GUY WIRE DEAD - ENDS MEET 100% OF THE WIRE RATED BREAKING STRENGTH (RBS) AS SHOWN IN TABLE.

2.B - COAT BEZINAL PER ASTM A855. B- COAT IS STANDARD. 3.HAND LAY STANDARD DIRECTION: LEFT

4.ALL DIMENSIONS ARE FOR REFERENCE ONLY.

DRN BY:	DATA	
Ella	07/09/16	

CONTEINT HE THE SEAWING AND ITS CONTENTS PROPERTY OF TAIN TUDGE A ELECTRIC POWER TECHNOLOGY CO.LTD. NO PREILCATION. DISTRIBUTION OR COPES MAY BE MADE WITHOUT THE WRITT TOOR A ELECTRIC POWER TECHNOLOGY CO.LTD. THANDIN TUDGE A ELECTRIC POWER TECHNOLOGY CO.LTD. UNIVERSITY TECHNOLOGY CO.LTD. UNIVERSITY ECHNOLOGY CO.LTD. UNIVERSITY ECHNOL

FORMED WIRE DEADEND, LENGTH: 49 IN



TTF POWER TECHNOLOGY CO.