
CATALOG NUMBER: 01A0T6V

STAND SPLICE CHART (GALVANIZED)								
SIZE	HPS#	STAND CONSTRUCTION	SUBSETS		COLOR CODE	APPLICATION	POUNDS	SIZE
			"A"	"B"	"C"	(IN)	(LBS)	(IN)
3/16	01A0T6V_1	7W	3	27	RED	0.174 - 0.203 EHS STEEL STRAND	3990	3/16
7/32	01A0T6V_2	7W	3	29	GREEN	0.204 - 0.230 EHS STEEL STRAND	5400	7/32
1/4	01A0T6V_3	3W, 7W	2	35	YELLOW	0.231 - 0.259 EHS STEEL STRAND	6600	1/4
9/32	01A0T6V_4	7W	2	38	BLUE	0.260 - 0.291 EHS STEEL STRAND	8900	9/32
5/16	01A0T6V_5	3W, 7W	3	42	BLACK	0.292 - 0.336 EHS STEEL STRAND	11200	5/16
3/8	01A0T6V_6	3W, 7W	3	48	ORANGE	0.337 - 0.394 EHS STEEL STRAND	15400	3/8
7/16	01A0T6V_7	7W	3	54	GREEN	0.395 - 0.474 EHS STEEL STRAND	20800	7/16
1/2	01A0T6V_8	7W	3	60	BLUE	0.475- 0.515 EHS STEEL STRAND	26900	1/2
9/16	01A0T6V_9	7W	3	66	YELLOW	0.516 - 0.570 EHS STEEL STRAND	30000	9/16

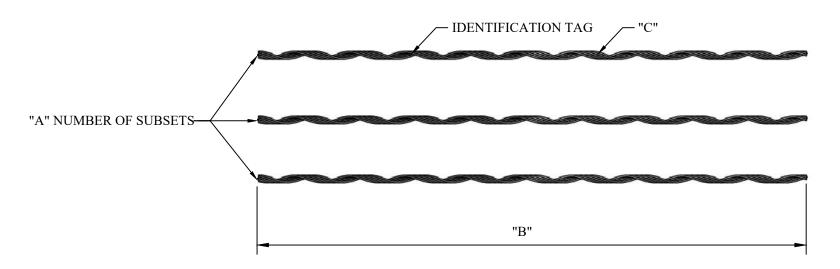

NOTES:

- 1.ALL SPLICES MEET 100% OF THE WORE RATED BREAKING STRENGTH (RBS) AS SHOWN IN TABLE.
- 2.B-COAT OR C-COAT GALVANIZED PER ASTM A641, B-COAT STANDARD.
- 3.HAND LAY DIRECTION: LEFT.
- 4.ALL DIMENSIONS FOR REFERENCE ONLY.
- 5.GRIT PRESENT IN INNER FORMED AREA ALONG THE LENGTH OF SPLICE.

DRN BY:	DATA
Ella	07/09/16

CONFIDENTIALTHES DRAWING AND ITS CONTENTS PROPERTY OF TAMIN TUGHA ELECTRIC POWER TECHNOLOGY CO.LTD. NO PUBLICATION.
DISTRIBUTION OR COPES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TRANIN TUGHA ELECTRIC POWER TECHNOLOGY CO.LID.
TIANIN TUGHA ELECTRIC POWER TECHNOLOGY CO.LID UNVIBLISHED ACCUPATION OF RESERVED UNDER THE CHNOLOGY CO.LTD UNVIBLISHED ACCUPATION OF RESERVED UNDER THE COPYRIGHT LAWS.

GALVANIZED STEEL FORMED WIRE



TTF POWER TECHNOLOGY CO.