
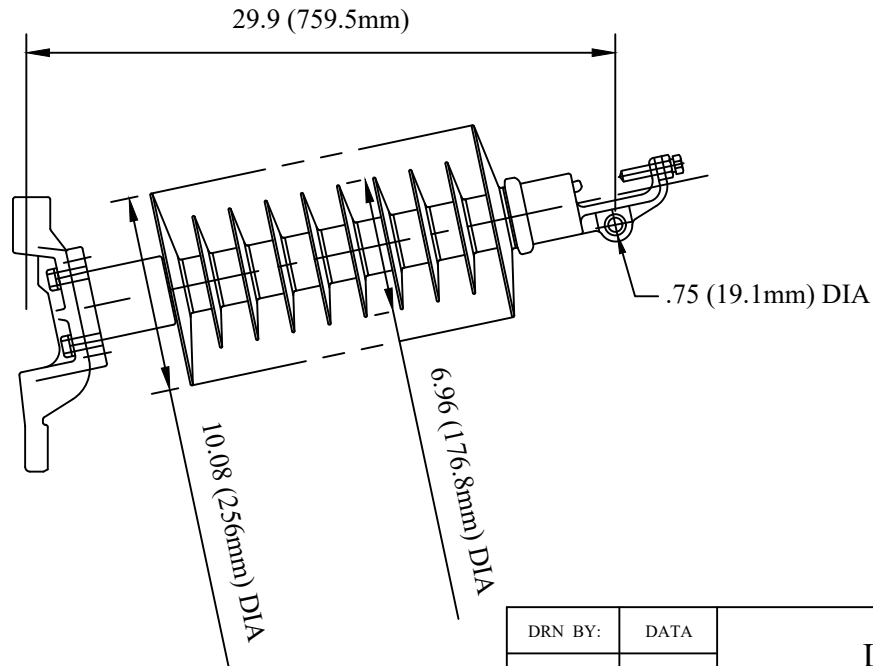



CATALOG NUMBER : 07B4Z5G

STRIKE DISTANCE	23.1 IN
LEAKAGE DISTANCE	60.0 IN
DRY 60 HZ FLASHOVER	230 KV
WET 60 HZ FLASHOVER	180 KV
IMPULSE CRITICAL POSITIVE	360 KV
IMPULSE CRITICAL NEGATIVE	470 KV
IMPULSE WITHSTAND POSITIVE	330 KV
SCL	5000 LB (22.2 KN)
RCL	2500 LB (11.1 KN)
WEIGHT	50 LB

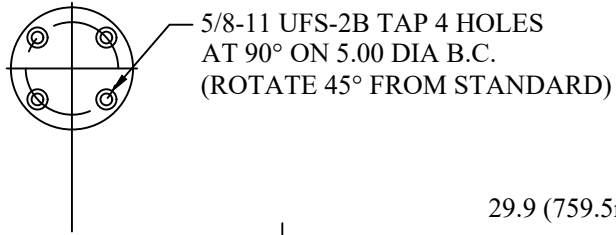

DRN BY:	DATA
Ella	07/09/16
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

LINE POST INSULATOR,
69 KV VOLTAGE RATING



TTF POWER TECHNOLOGY CO.