


CATALOG NUMBER : 08A139F

NOTES:

- 1.DIMENSIONS SUBJECT TO +/- 3% TOLERANCE
- 2.LEAKAGE DISTANCE (inches) - 17
- 3.ALTITUDE 0-12000 FT. ABOVE SEA LEVEL
- 4.WEIGHT OF UNIT INCLUDING HARDWARE - 2.9 LB.
- 5.MAXIMUM CONTINUOUS LINE-TO-GROUND OPERATING VOLTAGE 10.2 KV MCOV
- 6.VOLTAGE RATING 12 KV RMS.

3/8-16 STUD  
HEX NUT &  
WIRE CLAMP

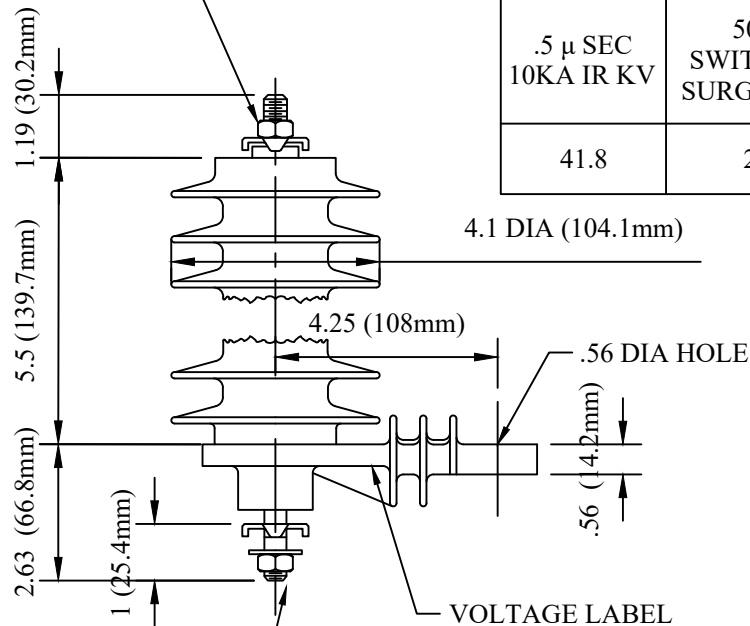

.5 $\mu$ SEC 10KA IR KV	500 A SWITCHING SURGE IR KV	MAXIMUM 8/20 DISCHARGE VOLTAGE - KV AT				
		1.5 KA	3.0 KA	5 KA	10 KA	20 KA
41.8	27.8	30.4	32.6	34.5	37.6	42.7

3/8-16 STUD, WIRE CLAMP,  
RETAINER, FLATWASHER  
& HEX NUT

DRN BY:	DATA
Ella	10/08/16
<small>CONFIDENTIAL. THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO., LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO., LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO., LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

**PDV-100 OPTIMA ARRESTER (10.2 KV MCOV, 7214 HARDWARE)**



**TTF POWER TECHNOLOGY CO.**