
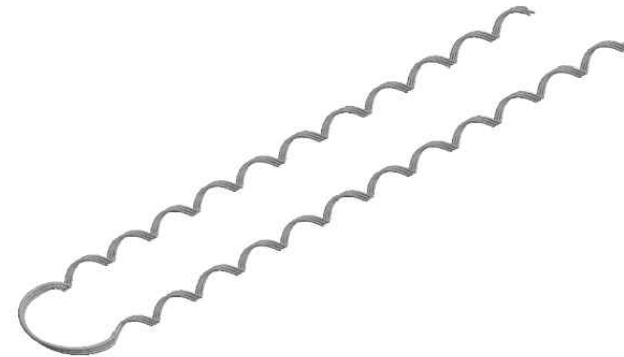


CATALOG NUMBER : 01A7L1Z

CATALOG NUMBER	CONDUCTOR SIZE (ACSR)	CONDUCTOR SIZE (AAC)	CONDUCTOR SIZE (AAAC)	CONDUCTOR SIZE (COMP ACSR)	CONDUCTOR SIZE (AWAC)	APPLICATION RANGE	DIM A	DIM B	DIM C	WEIGHT
01A7L1Z_1	#6, 6/1	#6, 7W	#6, 7W	#6, 6/1	-	0.182 TO 0.203 [4.623 TO 5.16]	16 [406]	14 [356]	1.0 [25.4]	13.400 [6.08]
01A7L1Z_2	#4, 6/1 & #4, 7/1	#4, 7W	#4, 7W	#4, 6/1	#4, 6/1	0.229 TO 0.257 [5.82 TO 6.53]	16.9 [430]	14.9 [379]	1.0 [25.4]	17.900 [8.12]
01A7L1Z_3	#4, 6/1 & #2, 7/1	#2, 7W	#2, 7W	#2, 6/1	#2, 6/1 & #3, 5/2	0.290 TO 0.325 [7.37 TO 8.26]	24 [610]	22 [559]	1.0 [25.4]	30.600 [13.88]
01A7L1Z_4	#1, 6/1	#1, 7W	#1, 7W	#1, 6/1	#1, 6/1	0.326 TO 0.364 [8.28 TO 9.25]	26 [660]	24 [610]	1.0 [25.4]	25.500 [11.57]
01A7L1Z_5	1/0, 6/1	1/0, 7W	1/0, 7W	1/0, 6/1	1/0, 6/1 & #1, 5/2	0.365 TO 0.409 [9.27 TO 10.39]	26.4 [671]	24.4 [620]	1.0 [25.4]	27.200 [12.34]
01A7L1Z_6	2/0, 6/1	2/0, 7W	2/0, 7W	2/0, 6/1	2/0, 6/1 & 1/0, 5/2	0.410 TO 0.460 [10.41 TO 11.68]	28 [711]	26 [660]	1.0 [25.4]	29.200 [13.25]
01A7L1Z_7	3/0, 6/1	3/0, 7W	3/0, 7W	3/0, 6/1	3/0, 6/1 & 2/0, 5/2	0.461 TO 0.516 [11.71 TO 13.11]	32.5 [825]	30.5 [775]	1.0 [25.4]	21.000 [9.53]
01A7L1Z_8	4/0, 6/1	4/0, 7W	4/0, 7W	4/0, 6/1	4/0, 6/1 & 3/0, 5/2	0.517 TO 0.577 [13.13 TO 14.66]	34.1 [865]	32.1 [815]	1.0 [25.4]	60.000 [27.22]
01A7L1Z_9	266.8 MCM, 18/1 & 26/7 300 MCM, 18/1	266.8 MCM, 19W & 37W 300 MCM, 19W & 37W	266.8 MCM, 19W	300 MCM, 18/1 336.4 MCM, 18/1	266.8 MCM, 18/1	0.578 TO 0.653 [14.68 TO 16.59]	35 [889]	33 [838]	1.0 [25.4]	34.000 [15.42]
01A7L1Z_10	300 MCM, 26/7 & 30/7 366 MCM, 18/1, 36/1 & 26/7 397.5 MCM, 36/1	336.4 MCM, 19W & 37W 350 MCM, 19W & 37W 397.5 MCM, 19W & 37W 400 MCM, 19W & 37W	336.4 MCM, 19W	397.5 MCM, 18/1	336.4 MCM, 18/1	0.654 TO 0.739 [16.61 TO 18.77]	38.6 [980]	36.6 [930]	1.0 [25.4]	52.700 [23.90]

ITEM	DESCRIPTION	MATERIAL
1	DISTRIBUTION GRIP DEAD-END	ALUMINUM CLAD STEEL

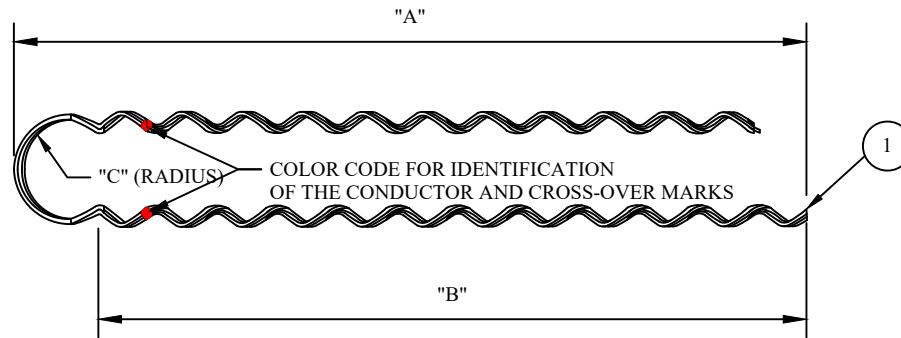

NOTES:

1. ALL DIMENSIONS FOR REFERENCE ONLY. DISTANCE. [MM], FORCE LBS. [KN], TORQUE IN. LBS. [N.M], & WEIGHT LBS. [KG].
2. RATINGS:
 - A. ALL DISTRIBUTION GRIP DEADENDS MUST MEET 60% OF THE WIRE RATED BREAKING STRENGTH (RBS)
3. CERTIFICATIONS, SPECIFICATIONS, & STANDARDS:
 - A. ALUMINUM CLAD STEEL PER ASTM B415
4. SUFFIXES & VARIANT CONFIGURATION
 - A. N/A
5. HAND LAY DIRECTION: RIGHT

DRN BY:	DATA
Ella	10/10/16
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

DEADEND FOR DISTRIBUTION FEEDER



TTF POWER TECHNOLOGY CO.