


CATALOG NUMBER : 01C0Q4B

CATALOG NUMBER	PRIMARY STRAND APPLICATION	RANGE (IN)	RANGE (MM)	DIMENSIONS
				A
01C0Q4B_1	1/4"	0.240-0.253	6.11-6.44	6.4
01C0Q4B_2	5/16"	0.310-0.335	7.89-8.53	7.2
01C0Q4B_3	3/8"	0.360-0.405	9.16-10.31	8.1

DIMENSIONS FOR REFERENCE ONLY

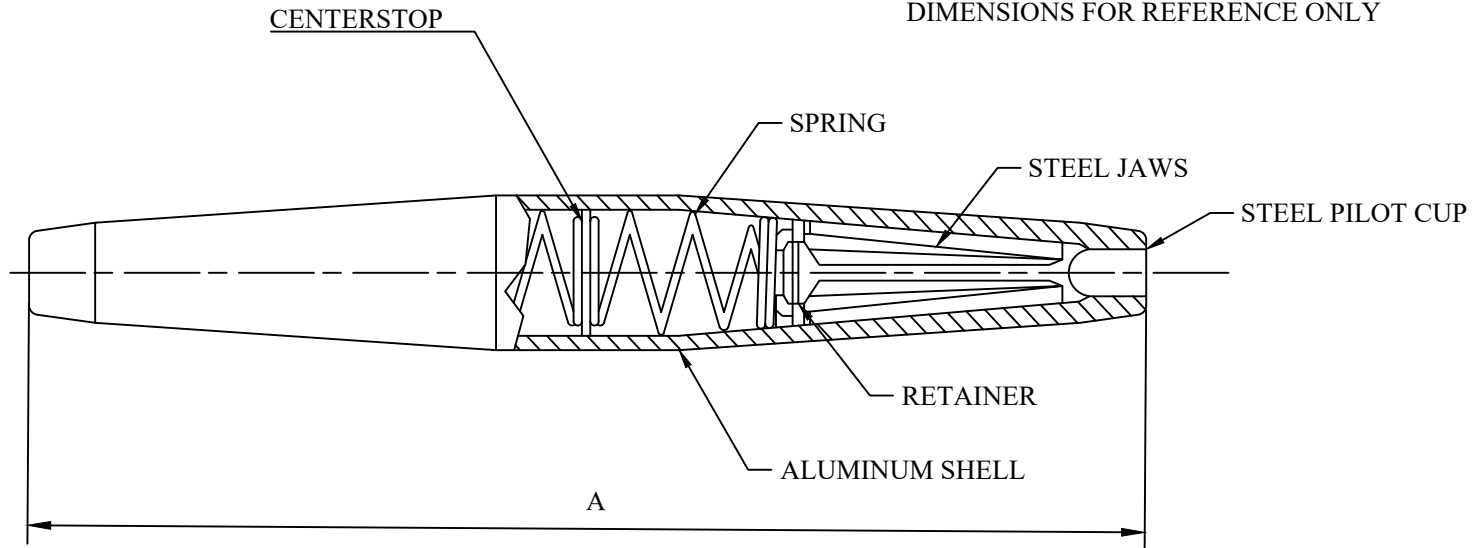

NOTES:

- 1.CONDUCTOR SHOULD BE CLEANED. STRAIGHT, IN LAY AND FREE OF BURRS.
- 2.INSERT CONDUCTOR INTO SPLICE AS FAR AS POSSIBLE. PULL CONDUCTOR BACK FOR INITIAL GRIP.
- 3.APPLY MOMENTARY TENSION BEFORE RELEASING BLOCKS TO MAKE CERTAIN JAWS ARE "SET" ON CONDUCTOR.

DRN BY:	DATA
Ella	10/10/16
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

FULL TENSION AUTOMATIC SPLICE



TTF POWER TECHNOLOGY CO.