
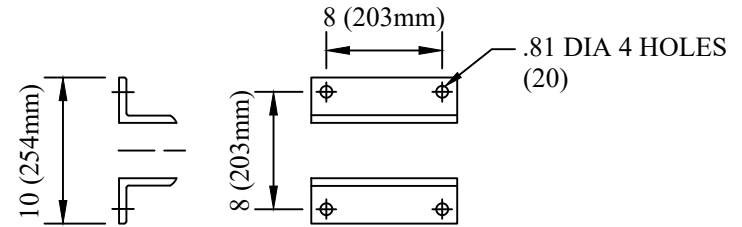


CATALOG NUMBER : 07H8E6E

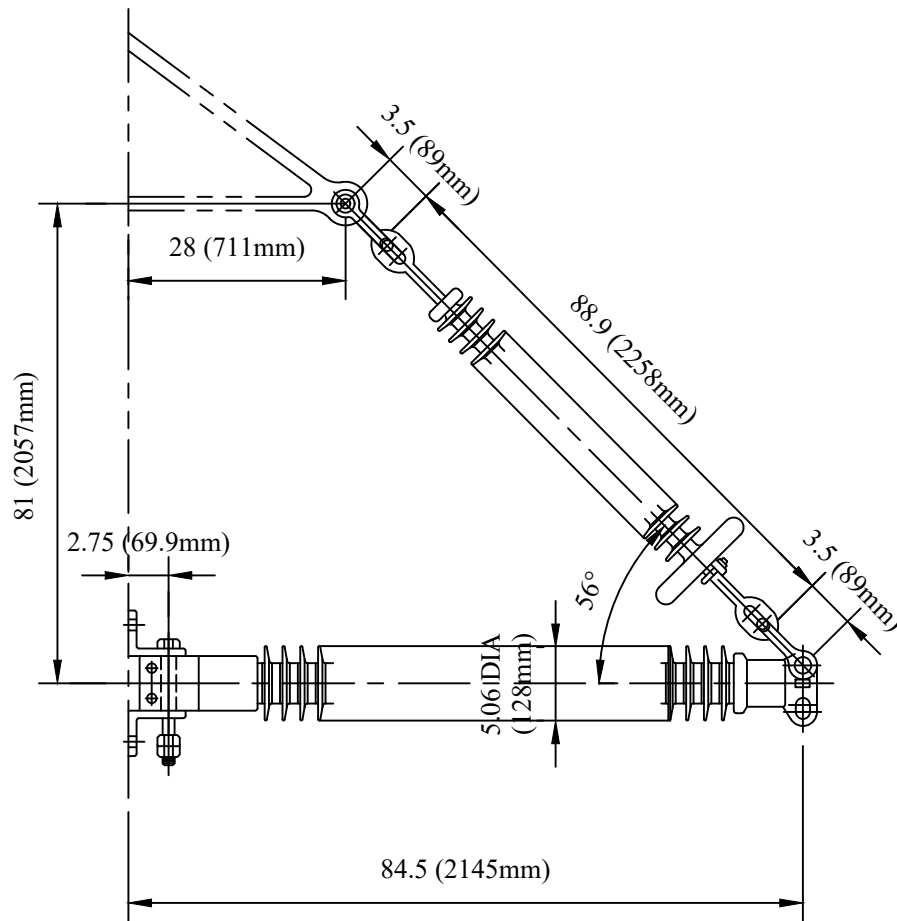

MOUNTING BASE DETAIL

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C29.11-1989

DRY 60 HZ FLASHOVER	665
WET 60 HZ FLASHOVER	605
IMPULSE POSITIVE FLASHOVER	1030
IMPULSE NEGATIVE FLASHOVER	1130

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH IEC-60383

WET 60 HZ 1-MIN WITHSTAND	450
IMPULSE POSITIVE WITHSTAND	925
IMPULSE NEGATIVE WITHSTAND	1015

MAX WORKING LOADS. LBA (KN)

VERTICAL	10150 (45.1)
TRANSVERSE TENSION	7500 (33.3)
COMPRESSION	7500 (33.3)
LONGITUDINAL	7500 (33.3)

LEAKAGE DISTANCE	183
STRIKE DISTANCE	67

DRN BY:	DATA
Ella	10/10/16

CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

SILICONE LINE
POST INSULATOR



TTF POWER TECHNOLOGY CO.