


CATALOG NUMBER : 06K3H0Y

CATALOG NUMBER	MINIMUM ULTIMATE*			WEIGHT (EACH)
	VERTICAL V	LONGITUDINAL L	TRANSVERSE T	
LIGHT DUTY 1 1/4" (32mm) DIA. FIBERGLASS ROD				
06K3H0Y	3000 LBS. (1361 KG)	1200 LBS. (544 KG)	4000 LBS. (1814 KG)	18.1 LBS. (8.2 KG)

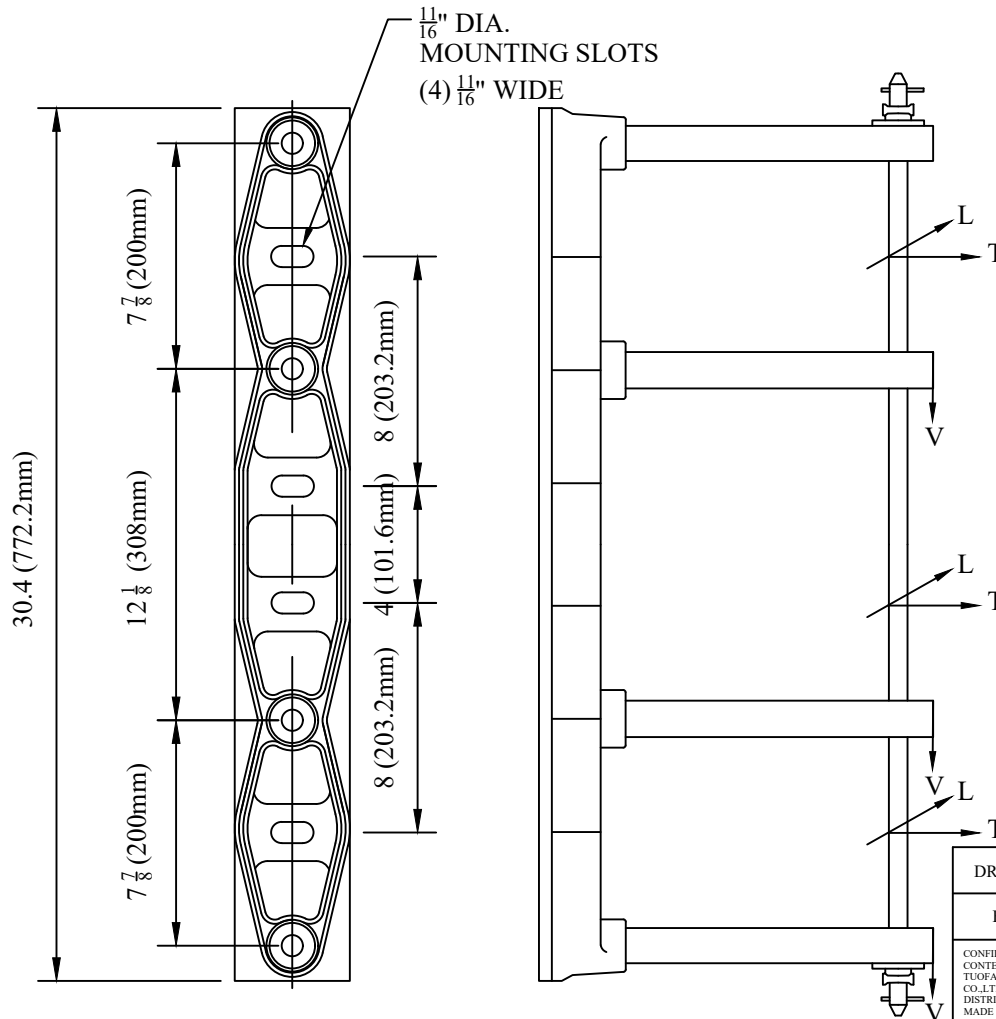

BASE IS ALUMINUM ALLOY.

*RECOMMENDED MAXIMUM WORKING LOAD IS 50% OF MINIMUM ULTIMATE RATINGS LISTED.

*MINIMUM ULTIMATE LOAD PER INSULATOR (SPOOL INSULATORS NOT INCLUDED)

DRN BY:	DATA
Ella	10/10/16

CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.



THREE-PHASE
CORNER BRACKET

TTF POWER TECHNOLOGY CO.