
CATALOG NUMBER: 01A3A5A

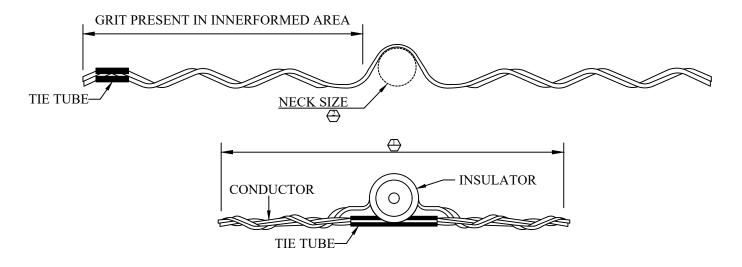

CATALOG	1	2	APPLICATION RANGE
NUMBER	APPLIED LENGTH	NECK SIZE	
01A3A5A_1	19	1.77	.245 TO .277 (6.22 TO 7.04 mm)
01A3A5A_2	24	1.77	.316 TO .357 (8.03 TO 9.07 mm)
01A3A5A_3	26	1.77	.358 TO .405 (9.09 TO 10.29 mm)
01A3A5A_4	28	1.77	.406 TO .459 (10.31 TO 11.66 mm)
01A3A5A_5	31	1.77	.460 TO .520 (11.68 TO 13.21 mm)
01A3A5A_6	32	1.77	.521 TO .588 (13.3 TO 14.94 mm)
01A3A5A_7	23	1.77	.589 TO .665 (14.96 TO 16.98 mm)
01A3A5A_8	25	1.77	.666 TO .755 (16.92 TO 19.18 mm)
01A3A5A_9	32	1.77	.756 TO .858 (19.20 TO 21.79 mm)

NOTES:

- 1.ALUMINUM CLAD STEEL.
- 2.DIMENSIONS: INCHES (MILLIMETERS) FOR REFERENCE ONLY.
- 3.HAND LAY STANDARD DIRECTION: RIGHT.
- 4.SPOOL INSULATORS SHOULD BE PER ANSI 53-1, 53-2, 53-3 (1-3/4" NECK DIA). J-NECK 3-1/2" DIA).
- 5.SUFFIX "NT" MEANS NO TIE TUBE.

DRN BY:	DATA
Ella	09/07/17

CONFIDENTIAL:THIS DRAWING AND ITS CONTENTS PROPERTY OF THANIN TUGFA ELECTRIC FOWER TECHNOLOGY CO.LTD. NO PUBLICATION.

OLITICAL STRUCTURE OF THE THE THE THE THAN THE MADE WITHOUT THE WRITTEN CONSENT OF THANIN TUGFA ELECTRIC POWER TECHNOLOGY CO.LTD. THANIN TUGFA ELECTRIC POWER TECHNOLOGY CO.LTD. UNIVELSIBLED ALL RIGHTS RESERVED UNDER THE CONTRICT OF THE CONTRICT OF

ALUMINUM CLAD STEEL FORMED WIRE SPOOL TIE



TTF POWER TECHNOLOGY CO.