


CATALOG NUMBER : 05B1R20

CATALOG NUMBER	CONDUCTOR RANGE		DECIMAL RANGE INCHES (MM)		ULTIMATE STRENGTH (LBS.)		DIMENSIONS INCHES (MM)					
	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM	BODY	SAG EYE	A	B	C	D	E	F
05B1R20_1	#4 STR AAC	2/0 STR AAC	.23 (5.8)	.45 (11.4)	6,000	4,000	9.46 (240.1)	2.96 (75.1)	3.97 (100.8)	.75 (19.2)	1.58 (40.1)	1.35 (34.3)
	#4 AAAC	2/0 AAAC										
	#4 ACSR	2/0 ACSR										
	#4 STR CU	2/0 STR CU										
05B1R20_2	#4 STR AAC	4/0 STR AAC	.23 (5.8)	.57 (14.5)	9,000	6,000	9.84 (249.8)	3.31 (84.0)	4.08 (103.6)	.76 (19.2)	1.69 (42.9)	1.36 (34.6)
	#4 AAAC	4/0 AAAC										
	#4 ACSR	4/0 ACSR										
	#4 STR CU	3/0 STR CU										

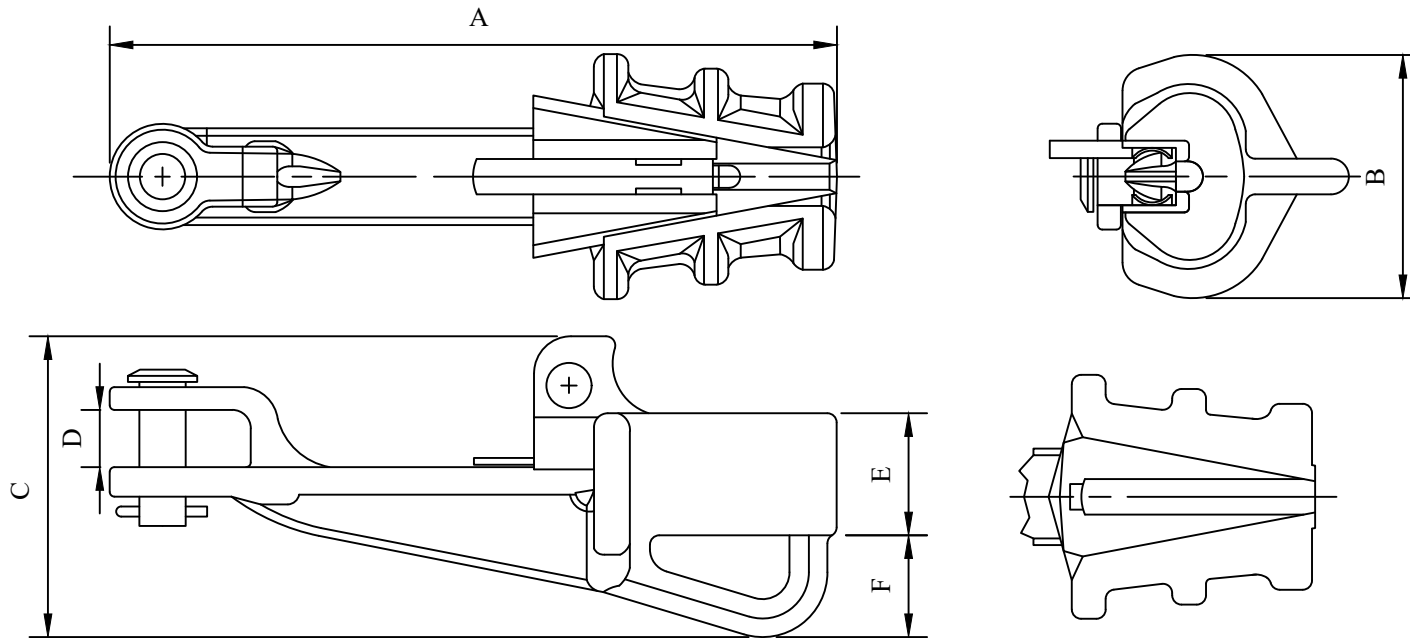

DRN BY:	DATA
Ella	09/07/17
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

AUTOMATIC SIDE OPENING WEDGE DEADEND



TTF POWER TECHNOLOGY CO.