CATALOG NUMBER : 01B3D2F

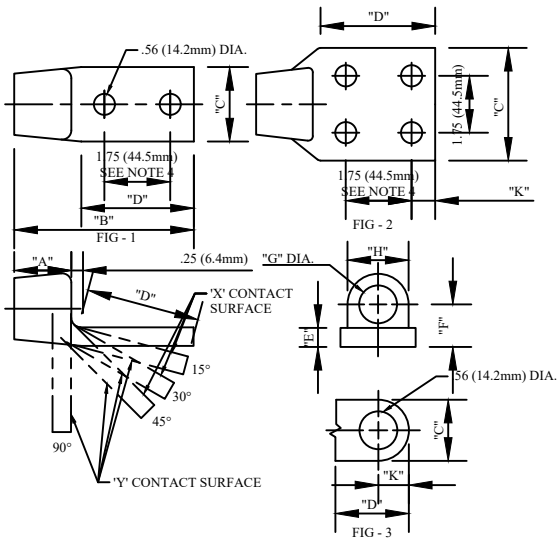

CABLE RANGE		CATALOG NUMBER	FIG NO.	DIMENSIONS IN INCHES								
DECIMAL	MCM OR AWG			A	B	C	D	E	F	G	H	K
.368-.373	1/0	01B3D2F_1B	1	.75	4.25	1.50	3.25	.25	.56	.39	.81	.63
.398-.418	2/0	01B3D2F_2B	1	.75	4.25	1.50	3.25	.25	.56	.45	.81	.63
.447-.470	3/0	01B3D2F_3B	1	1.0	4.50	1.50	3.25	.31	.69	.50	1.0	.63
.502-.528	4/0	01B3D2F_4B	1	1.0	4.50	1.50	3.25	.31	.69	.56	1.0	.63
.563-.593	250-266.8	01B3D2F_5B	1	1.0	4.50	1.50	3.25	.31	.69	.63	1.0	.63
.563-.593	250-266.8	01B3D2F_6C	2	1.0	4.50	3.0	3.25	.31	.69	.63	1.0	.63
.609-.642	300	01B3D2F_7B	1	1.0	4.50	1.50	3.25	.38	.88	.67	1.31	.63
.625-.670	300-336.4	01B3D2F_8C	2	1.25	4.75	3.0	3.25	.38	.75	.69	1.31	.63
.666-.684	336.4-350	01B3D2F_9B	1	1.25	4.75	1.50	3.25	.38	.88	.72	1.31	.63
.666-.684	336.4-350	01B3D2F_10C	2	1.25	4.75	3.0	3.25	.38	.88	.72	1.31	.63
.721-.728	397.5-400	01B3D2F_11B	1	1.25	4.75	1.50	3.25	.38	.88	.72	1.31	.63
.721-.728	397.5-400	01B3D2F_12C	2	1.25	4.75	3.0	3.25	.38	.88	.72	1.31	.63
.772-.795	450-477	01B3D2F_13B	1	1.25	4.75	1.50	3.25	.38	.88	.83	1.31	.63
.772-.795	450-477	01B3D2F_14C	2	1.25	4.75	3.0	3.25	.38	.88	.83	1.31	.63
.806-.846	500	01B3D2F_15B	1	1.25	4.75	1.50	3.25	.38	.88	.88	1.31	.63
.806-.846	500	01B3D2F_16C	2	1.25	4.75	3.0	3.25	.38	.88	.88	1.31	.63
.855-.883	550-556.5	01B3D2F_17B2	1	1.50	5.0	2.0	3.25	.50	1.12	.92	1.63	.63
.855-.883	550-556.5	01B3D2F_18C	2	1.50	5.0	3.0	3.25	.50	1.12	.92	1.63	.63
.891-.930	600-650	01B3D2F_19B2	1	1.50	5.0	2.0	3.25	.50	1.12	.96	1.63	.63
.891-.930	600-650	01B3D2F_20C	2	1.50	5.0	3.0	3.25	.50	1.12	.96	1.63	.63
.953-.977	700-715.5	01B3D2F_21B2	1	1.50	5.0	2.0	3.25	.50	1.12	1.03	1.63	.63
.953-.977	700-715.5	01B3D2F_22C	2	1.50	5.0	3.0	3.25	.50	1.12	1.03	1.63	.63
.990-1.028	750-795	01B3D2F_23B2	1	1.50	5.0	2.0	3.25	.50	1.12	1.06	1.63	.63
.990-1.028	750-795	01B3D2F_24C	2	1.50	5.0	3.0	3.25	.50	1.12	1.06	1.63	.63
1.031-1.081	800-874.5	01B3D2F_25B2	1	1.75	5.25	2.0	3.25	.63	1.38	1.12	1.88	.63
1.031-1.081	800-874.5	01B3D2F_26C	2	1.75	5.25	3.0	3.25	.63	1.38	1.12	1.88	.63
1.093-1.125	900-954	01B3D2F_27B2	1	1.75	5.25	2.0	3.25	.63	1.38	1.17	1.88	.63
1.093-1.125	900-954	01B3D2F_28C	2	1.75	5.25	3.0	3.25	.63	1.38	1.17	1.88	.63
1.140-1.172	1000-1033.5	01B3D2F_29B2	1	1.75	5.25	2.0	3.25	.63	1.38	1.23	1.88	.63
1.140-1.172	1000-1033.5	01B3D2F_30C	2	1.75	5.25	3.0	3.25	.63	1.38	1.23	1.88	.63
1.209-1.246	1100-1113	01B3D2F_31B2	1	2.0	5.50	2.0	3.25	.75	1.69	1.30	2.25	.63
1.209-1.246	1100-1113	01B3D2F_32C	2	2.0	5.50	3.0	3.25	.75	1.69	1.30	2.25	.63
.398-.418	2/0	01B3D2F_33A	3	.75	2.75	1.50	2.0	.25	.56	.45	.81	.75
1.263-1.315	1200-1300	01B3D2F_34B2	1	2.0	5.50	2.0	3.50	.75	1.69	1.36	2.25	.63
1.263-1.315	1200-1300	01B3D2F_35C	2	2.0	5.50	3.0	3.50	.75	1.69	1.36	2.25	.63
1.364-1.412	1400-1500	01B3D2F_36B2	1	2.0	5.50	2.0	3.50	.75	1.69	1.46	2.25	.63
1.364-1.414	1400-1500	01B3D2F_37C	2	2.0	5.50	3.0	3.50	.75	1.69	1.46	2.25	.63
1.454-1.504	1590-1700	01B3D2F_38C	2	2.50	6.0	3.0	3.25	.75	1.69	1.55	2.63	.63
1.526-1.590	1750-1900	01B3D2F_39C	2	2.50	6.0	3.0	3.25	.75	1.69	1.63	2.63	.63
1.630-1.631	2000	01B3D2F_40C	2	2.50	6.0	3.0	3.25	.75	1.69	1.72	2.63	.63
1.340	1351-5	01B3D2F_41B2	1	2.0	5.50	2.0	3.25	.75	1.69	1.39	2.25	.63
.741	336.4-30/7	01B3D2F_42C	2	1.25	4.75	3.0	3.50	.38	.88	.78	1.31	.63
1.340	1351.5	01B3D2F_43C	2	2.0	5.50	3.0	3.25	.75	1.69	1.39	2.25	.63
2.400	---	01B3D2F_44D	2	2.75	7.25	4.0	4.25	1.0	2.50	2.46	3.50	1.12
.609-.642	300	01B3D2F_45B2	1	1.25	4.75	2.0	3.50	.38	.88	.67	1.31	.63
.666-.684	336.4-350	01B3D2F_46B2	1	1.25	4.75	2.0	3.50	.38	.88	.72	1.31	.63
.721-.728	397.5-400	01B3D2F_47B2	1	1.25	4.75	2.0	3.50	.38	.88	.78	1.31	.63
.772-.795	450-477	01B3D2F_48B2	1	1.25	4.75	2.0	3.50	.38	.88	.83	1.31	.63
.806-.846	500	01B3D2F_49B2	1	1.25	4.75	2.0	3.50	.38	.88	.88	1.31	.63
.447-.470	3/0	01B3D2F_50C	2	1.0	4.50	3.0	3.50	.56	.69	.50	1.0	.63
.502-.528	4/0	01B3D2F_51C	2	1.0	4.50	3.0	3.50	.56	.69	.56	1.0	.63
.563	4/0 ACSR	01B3D2F_52B2	1	1.0	4.50	2.0	3.50	.38	.75	.59	1.25	.63
.563	4/0 ACSR	01B3D2F_53C	2	1.0	4.50	3.0	3.50	.38	.75	.59	1.25	.63
1.454-1.504	1590-1700	01B3D2F_54B2	1	2.50	6.0	2.0	3.50	.75	1.75	1.55	2.63	.63
1.526-1.590	1750-1900	01B3D2F_55B2	1	2.50	6.0	2.0	3.50	.75	1.75	1.63	2.63	.63

CABLE RANGE		CATALOG NUMBER	FIG NO.	DIMENSIONS IN INCHES								
DECIMAL	MCM OR AWG			A	B	C	D	E	F	G	H	K
1.630-1.631	2000	01B3D2F_56B2	1	2.50	6.0	2.0	3.50	.75	1.75	1.72	2.63	.63
1.454-1.504	1590-1700	01B3D2F_57D	2	2.50	6.75	4.0	4.12	.63	1.63	1.55	2.63	1.12
.772-.795	450-477	01B3D2F_58D	2	1.25	5.75	4.0	4.50	.38	.88	.83	1.31	1.12
2.4		01B3D2F_59D	2	2.75	7.25	4.0	4.25	1.0	2.50	2.47	3.50	1.12
1.031-1.081	800-874.5	01B3D2F_60B2-90	1	1.75	-	2.0	3.50	.63	-	1.12	1.88	.63
1.209-1.246	1100-1113	01B3D2F_61D-Y90	2	2.0	-	4.0	4.25	.56	-	1.30	2.25	1.12
1.263-1.315	1200-1300	01B3D2F_62D-Y90	2	2.0	-	4.0	4.25	.56	-	1.36	2.25	1.12
1.364-1.412	1400-1500	01B3D2F_63D-Y90	2	2.0	-	4.0	4.25	.56	-	1.47	2.25	1.12
1.209-1.246	1100-1113	01B3D2F_64D-X/Y-45	2	2.0	-	4.0	4.25	.56	-	1.30	2.25	1.12
1.263-1.315	1200-1300	01B3D2F_65D-X/Y-45	2	2.50	-	4.0	4.25	.75	-	1.55	2.62	1.12
.447-.470	3/0	01B3D2F_66-C-Y-90	2	1.0	-	3.0	3.25	.31	-	.50	1.0	.63
.502-.528	4/0	01B3D2F_67-C-Y-90	2	1.0	-	3.0	3.25	.31	-	.56	1.0	.63
.563-.593	250-266.8	01B3D2F_68-C-Y-90	2	1.0	-	3.0	3.25	.31	-	.63	1.0	.63
.772-.795	450-477	01B3D2F_69-B-Y-90	1	1.25	-	1.50	3.25	.38	-	.83	1.31	.63
1.729-1.762	2250-2335.4	01B3D2F_70D-X/Y-45	2	2.75	-	4.0	4.25	1.0	-	1.81	3.25	1.12
1.823-1.824	2500-91&127	01B3D2F_71D-X/Y-45	2	2.75	-	4.0	4.25	1.0	-	1.88	3.25	1.12
1.912	2750-91	01B3D2F_72D-X/Y-45	2	2.75	-	4.0	4.25	1.0	-	1.97	3.25	1.12
1.996-2.158	3000-3500	01B3D2F_73D-X/Y-45	2	2.75	-	4.0	4.25	1.0	-	2.22	3.25	1.12
.953-.977	7000-7155	01B3D2F_74F	-	1.50	7.75	6.0	6.0	.50	1.12	1.03	1.63	1.75
.666-.684	336.4-350	01B3D2F_75B2-Y90	1	1.25	-	2.0	3.25	.38	-	.72	1.31	.63
.990-1.028	750-795	01B3D2F_76C-Y90	2	1.50	-	3.0	3.25	.50	-	1.06	1.63	.63
1.209-1.246	1100-1113	01B3D2F_77B2-Y90	1	2.0	-	2.0	3.25	.75	-	1.30	2.25	.63
.609-.642	300	01B3D2F_78B-X/Y-45	1	1.25	-	1.50	3.25	.38	-	.67	1.31	.63
.666-.684	336.4-350	01B3D2F_79B-X/Y-45	1	1.25	-	1.50	3.25	.38	-	.72	1.31	.63
.721-.728	397.5-400	01B3D2F_80B-X/Y-45	1	1.25	-	1.50	3.25	.38	-	.78	1.31	.63
.772-.795	450-477	01B3D2F_81B-X/Y-45	1	1.25	-	1.50	3.25	.38	-	.83	1.31	.63
.806-.846	500	01B3D2F_82B-X/Y-45	1	1.25	-	1.50	3.25	.38	-	.88	1.31	.63
.855-.883	500-556.5	01B3D2F_83C-X/Y-45	2	1.50	-	3.0	3.25	.50	-	.92	1.63	.63
.891-.930	600-650	01B3D2F_84C-X/Y-45	2	1.50	-	3.0	3.25	.50	-	.97	1.63	.63
.953-.977	700-715.5	01B3D2F_85C-X/Y-45	2	1.50	-	3.0	3.25	.50	-	1.03	1.63	.63
.990-1.028	750-795	01B3D2F_86C-X/Y-45	2	1.50	-	3.0	3.25	.50	-	1.06	1.63	.63
.990-1.028	750-795	01B3D2F_87B2-X/Y-45	1	1.50	4.0	2.0	3.25	.50	-	1.06	1.63	.63
1.823-1.824	2500-91&27	01B3D2F_88C	2	2.75	6.75	3.0	3.25	1.0	2.38	1.88	3.25	.63
1.454-1.504	1590-1700	01B3D2F_89D-X/Y-90	2	2.50	-	4.0	4.25	.75	-	1.55	2.63	1.12
1.729-1.762	2250-2335.4	01B3D2F_90D-X/Y-90	2	2.75	-	4.0	4.25	1.0	-	1.81	3.25	1.12
1.823-1.824	250-91&27	01B3D2F_91D-X/Y-90	2	2.75	-	4.0	4.25	1.0	-	1.88	3.25	1.12
.990-1.028	750-795	01B3D2F_92D	2	1.50	6.0	4.0	4.25	.50	1.12	1.06	1.63	1.12
.990-1.028	750-795	01B3D2F_93D-15	2	1.50	-	4.0	4.25	.50	-	1.06	1.63	1.12
1.630-1.631	2000	01B3D2F_94D-15	2	2.50	-	4.0	4.50	.75	-	1.72	2.63	1.12
.609-.642	300	01B3D2F_95B-X/Y-90	1	1.25	-	1.50	3.50	.25	-	.67	1.31	.63
1.093-1.125	900-954	01B3D2F_96C-X/Y-90	2	1.75	-	3.0	3.25	.63	-	1.17	1.88	.63
1.526-1.590	1750-1900	01B3D2F_97D-Y-90	2	2.50	-	4.0	4.25	.75	-	1.63	2.63	1.12
.772-.795	450-477	01B3D2F_98C-Y90	2	1.25	-	3.0	3.25	.38	-	.83	1.31	.63
.855-.883	550-556.5	01B3D2F_99C-Y90	2	1.50	-	3.0	3.25	.50	-	.92	1.63	.63
.990-1.028	750-795	01B3D2F_100D-90	2	1.50	-	4.0	4.25	.50	-	1.06	1.63	1.12
.666-.684	336.4-350	01B3D2F_101C-Y90	2	1.25	-	3.0	3.25	.38	-	.72	1.31	.63
1.454-1.504	1590-1700	01B3D2F_102D-X/Y-45	2	2.50	-	4.0	4.25	.75	-	1.55	2.63	1.12
1.093-1.125	900-954	01B3D2F_103B2-Y-90	1	1.75	-	2.0	3.50	.63	-	1.12	1.88	.63

NOTES:
1. MATERIAL: 356-F ALUMINUM ALLOY.
2. CONNECTIONS CAN BE SUPPLIED WITH BONDED COPPER LINER BY ADDING SUFFIX "C" TO CATALOG TYPE.
3. ANGLE CONNECTORS CAN BE SUPPLIED IN MULTIPLES OF 15° AS SHOWN TO OBTAIN CORRECT ANGLE TAKE-OFF, ADD ANGLE DESIRED AND LETTER DESIGNATING SURFACE DESIRED.
4. HOLE SPACING OTHER THAN SHOWN MUST BE SPECIFIED BY CUSTOMER.
5. "F" TONGUE WILL HAVE (4) .56 DIA HOLES IN 2.50 CENTERS.
6. CONNECTORS WITH UNDRILLED TONGUES HAVE SAME DIMENSIONS AS CONNECTORS WITH DRILLED TONGUES.

DRN BY:	DATA
Ella	09/07/17

CONFIDENTIAL:THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

CAST ALUMINUM WELDMENT TERMINAL

TTF POWER TECHNOLOGY CO.