


CATALOG NUMBER : 01A7Q3H

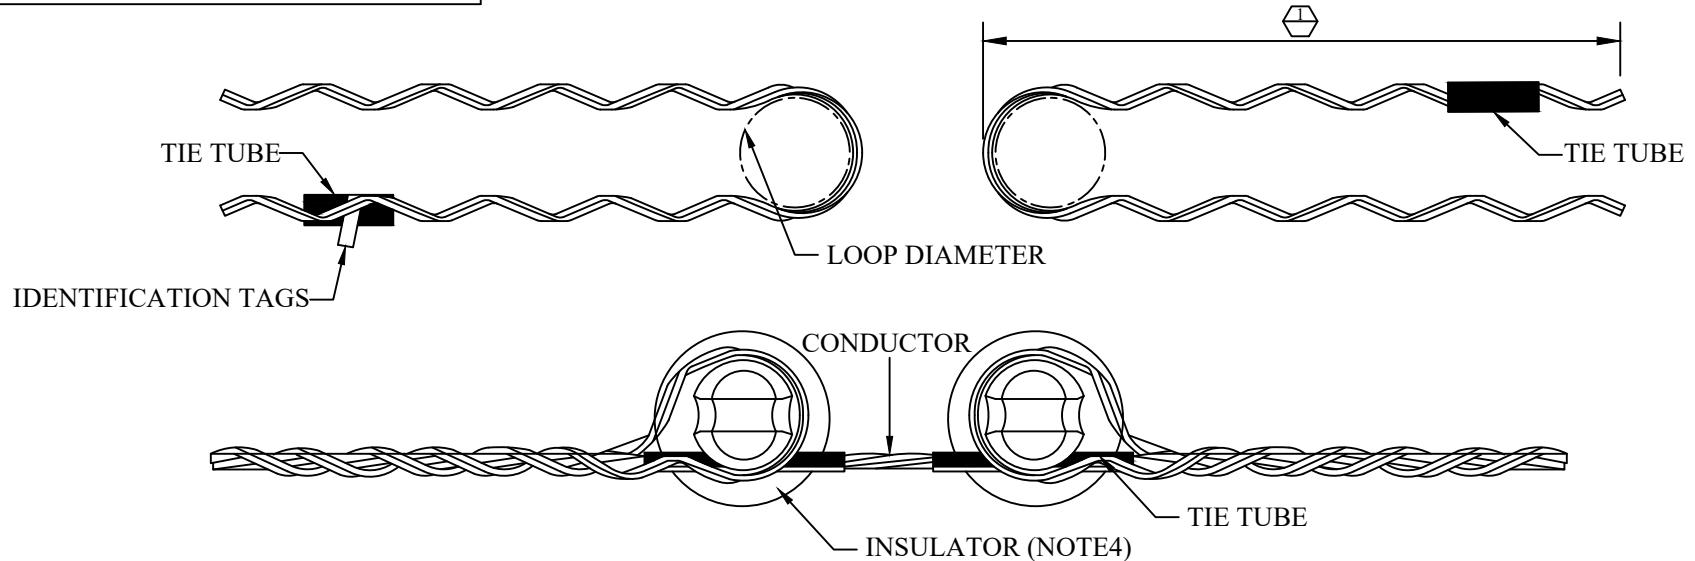

CATALOG NUMBER	1	APPLICATION RANGE
	APPLIED LENGTH	
01A7Q3H_1	16	0.245 TO 0.277 IN (6.22 TO 7.04mm)
01A7Q3H_2	16	0.278 TO 0.315 IN (7.06 TO 8.00 mm)
01A7Q3H_3	16	0.316 TO 0.357 IN (8.03 TO 9.07 mm)
01A7Q3H_4	17	0.358 TO 0.405 IN (9.09 TO 10.29 mm)
01A7Q3H_5	18	0.406 TO 0.459 IN (10.31 TO 11.66 mm)
01A7Q3H_6	19	0.460 TO 0.520 IN (11.68 TO 13.21 mm)
01A7Q3H_7	19	0.521 TO 0.588 IN (13.23 TO 14.94 mm)
01A7Q3H_8	20	0.589 TO 0.665 IN (14.96 TO 16.89 mm)
01A7Q3H_9	20	0.666 TO 0.755 IN (16.92 TO 19.18 mm)
01A7Q3H_10	20	0.756 TO 0.858 IN (19.20 TO 21.79 mm)
01A7Q3H_11	20	0.859 TO 0.968 IN (21.81 TO 24.60 mm)
01A7Q3H_12	24	0.969 TO 1.096 IN (24.16 TO 27.84 mm)
01A7Q3H_13	24	1.097 TO 1.240 IN (27.86 TO 31.50mm)
01A7Q3H_14	19	0.245TO 0.277 IN (6.22 TO 7.04 mm)
01A7Q3H_15	22	0.316 TO 0.357 IN (8.03 TO 9.07 mm)
01A7Q3H_16	21	0.358 TO 0.405 IN (9.09 TO 10.29 mm)
01A7Q3H_17	19	0.406 TO 0.459 IN (10.31 TO 11.66 mm)
01A7Q3H_18	23	0.969 TO 1.096 IN (24.16 TO 27.84 mm)

NOTES:

- 1.ALUMINUM CLAD STEEL.
- 2.DIMENSIONS: INCHES (MILLIMETERS)
- 3.HAND LAY STANDARD DIRECTION: RIGHT.
- 4.INSULATORS SHOULD BE PER ANSI C29.3, C 29.5 C29.6 AND C 29.7 NECK DIAMETERS: 2-1/4" OR 2-7/8".

DRN BY:	DATA
Ella	08/06/17
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

FORMED WIRE DOUBLE SIDE TIE



TTF POWER TECHNOLOGY CO.