
CATALOG NUMBER: 01A6O5Q

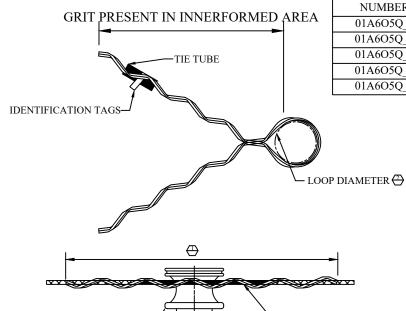

CATALOG	1	Z	APPLICATION RANGE
NUMBER	APPLIED LENGTH	LOOP DIAMETER	
01A6O5Q_1	20.50	1.77	0.245 TO 0.277 IN (6.22 TO 7.04mm)
01A6O5Q_2	20.50	1.77	0.316 TO 0.357 IN (8.03 TO 9.07 mm)
01A6O5Q_3	22.05	1.77	0.358 TO 0.405 IN (9.09 TO 10.29 mm)
01A6O5Q_4	23.15	1.77	0.406 TO 0.459 IN (10.31 TO 11.66 mm)
01A6O5Q_5	29.06	1.77	0.521 TO 0.588 IN (13.23 TO 14.94 mm)

NOTES:

SPOOL INSULATOR (NOTE 4)-

1.ALUMINUM COVERED STEEL.

2.DIMENSIONS: INCHES (MILLIMETERS).

3.HAND LAY STANDARD DIRECTION: RIGHT.

4.SPOOL INSULATOR SHALL BE PER ANSI 53-1, 53-2 AND 53-3. NECK DIAMETER: 1-3/4".

DRN BY:	DATA
Ella	09/07/17

CATALOG

THE TUBE

CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANIN TUGA ELECTRIC POWER TECHNOLOGY COLLTD. NO PUBLICATION, OF THE PROPERTY OF THE PR

FORMED WIRE SPOOL TIE



TTF POWER TECHNOLOGY CO.