


CATALOG NUMBER : 01A6M70

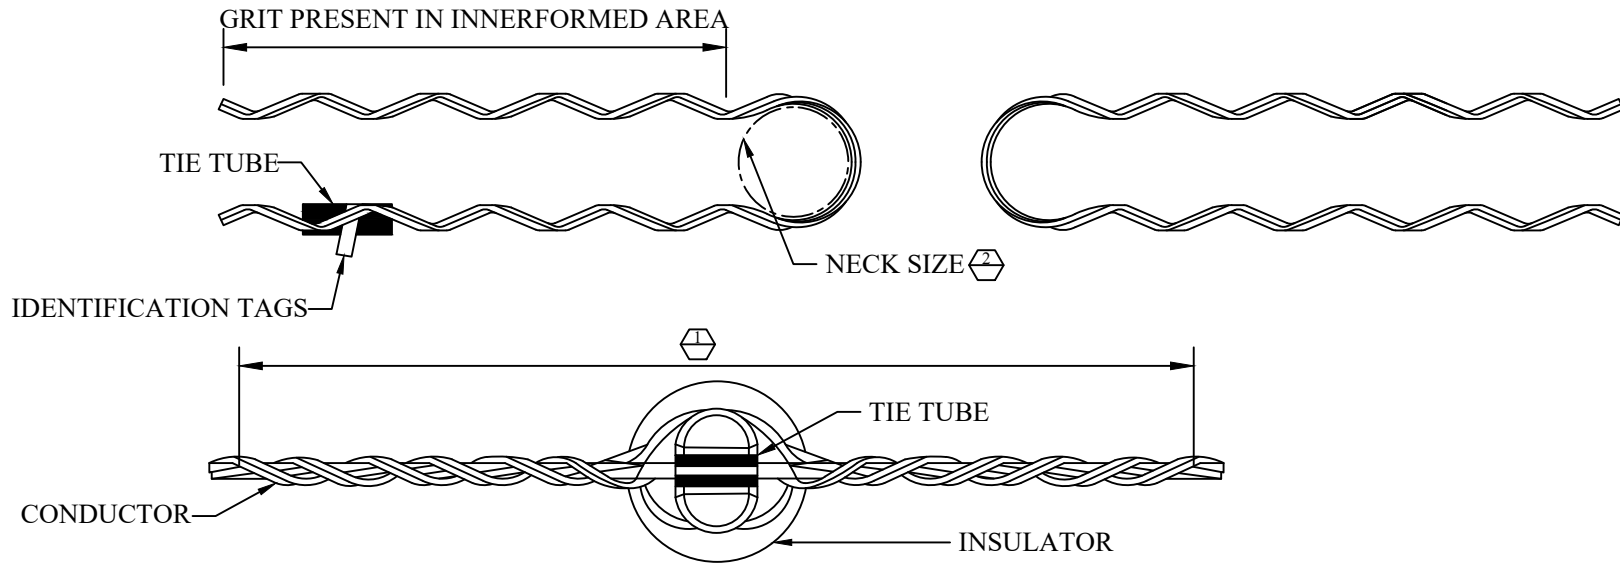

CATALOG NUMBER	1	2	APPLICATION RANGE
	APPLIED LENGTH	NECK SIZE	
01A6M70_1	23	"F" & "J" NECK	0.245 TO 0.277 IN (6.22 TO 7.04 mm)
01A6M70_2	25	"F" & "J" NECK	0.316 TO 0.357 IN (8.03 TO 9.07 mm)
01A6M70_3	27	"F" & "J" NECK	0.358 TO 0.405 IN (9.09 TO 10.29 mm)
01A6M70_4	28	"F" & "J" NECK	0.406 TO 0.459 IN (10.31 TO 11.66 mm)
01A6M70_5	30	"F" & "J" NECK	0.521 TO 0.588 IN (13.23 TO 14.94 mm)
01A6M70_6	33	"F" & "J" NECK	0.666 TO 0.755 IN (16.91 TO 19.18 mm)
01A6M70_7	37	"F" NECK	0.969 TO 1.096 IN (24.61 TO 27.84 mm)

NOTES:

- 1.ALUMINUM CLAD STEEL.
- 2.DIMENSIONS: INCHES (MILLIMETERS)
- 3.HAND LAY STANDARD DIRECTION: RIGHT.
- 4.HEADSTYLE INSULATORS SHOULD BE PER ANSI C29.3, C 29.5, C29.6, C 29.7  
(C-NECK 2-1/4" DIA. FI-NECK 2-7/8" DIA, J-NECK 3-1/2" DIA).

DRN BY:	DATA
Ella	09/07/17
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

FORMED WIRE  
TWIN TIE



TTF POWER TECHNOLOGY CO.