
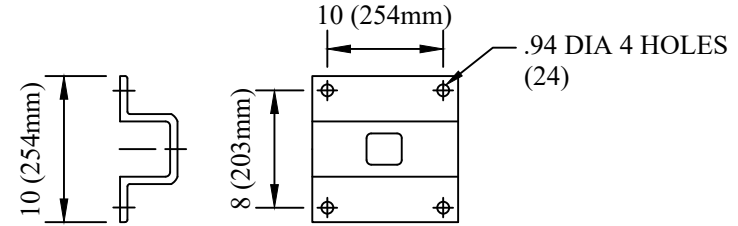


CATALOG NUMBER : 07H0S0U

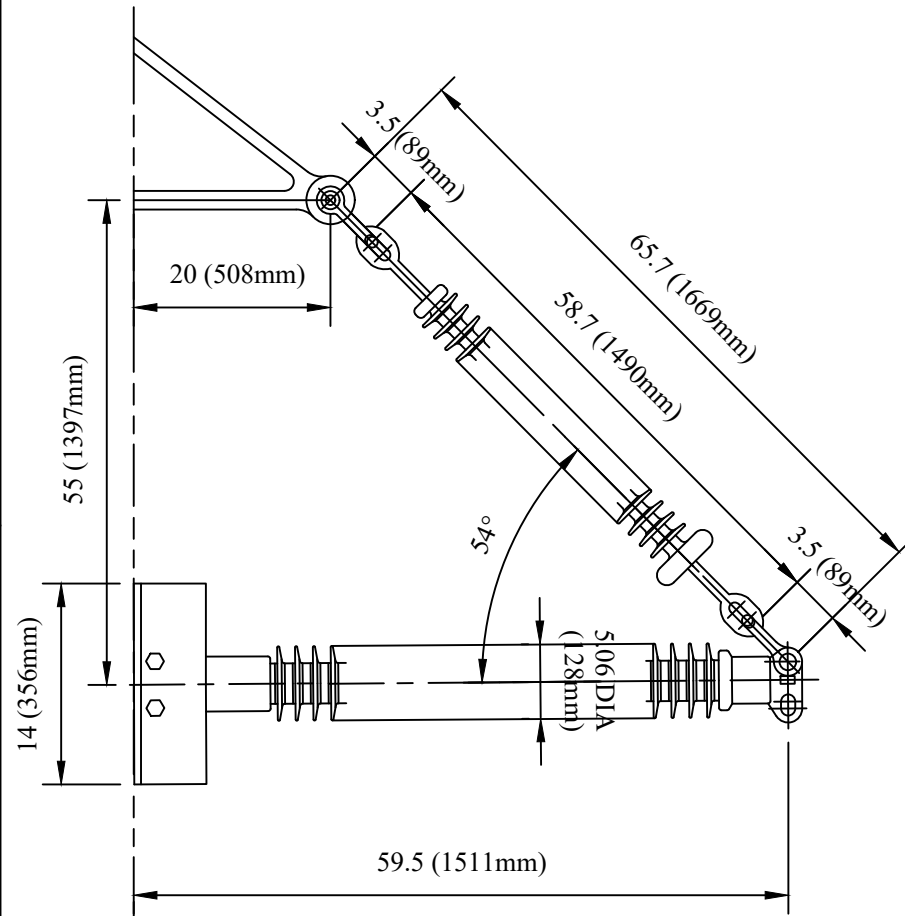

MOUNTING BASE DETAIL

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C29.11-1988

DRY 60 HZ FLASHOVER	425
WET 60 HZ FLASHOVER	390
IMPULSE POSITIVE FLASHOVER	675
IMPULSE NEGATIVE FLASHOVER	730

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH IEC-60383

WET 60 HZ 1-MIN WITHSTAND	295
IMPULSE POSITIVE WITHSTAND	605
IMPULSE NEGATIVE WITHSTAND	655

MAX WORKING LOADS. LBA (KN)

VERTICAL	10070 (44.7)
TRANSVERSE TENSION	7500 (33.3)
COMPRESSION	7500 (33.3)
LONGITUDINAL	1550 (6.8)

LEAKAGE DISTANCE	115
STRIKE DISTANCE	44

DRN BY:	DATA
Ella	08/06/17
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

GALVANIZED STEEL SILICONE
BRACED LINE POST INSULATOR



TTF POWER TECHNOLOGY CO.