


CATALOG NUMBER : 03C7E2U

TORQUE STRENGTH RATING - 5,500 FT-LB
 ULTIMATE TENSION & COMPRESSION STRENGTH - 60 KIP

NOTES:

- 1.HOT DIP GALVANIZE PER ASTM A153(LATEST REVISION).
- 2.EXTENSION SECTION LENGTHS ARE NOMINAL.
- 3.PIPE SHAFT MATERIAL 2.5" NOMINAL, SCHEDULE 40 WALL THICKNESS PER ASTM A500 GRADE B.
- 4.COUPLING BOLTS: $\frac{3}{4}$ " DIAMETER X 4.25" LONG HEX HEAD PER SAE H429 GRADE5.
- 5.EXTENSIONS ARE FABRICATED WITH A HOT FORGED EXPANDED INTEGRAL COUPLING CONNECT ON ONE END.

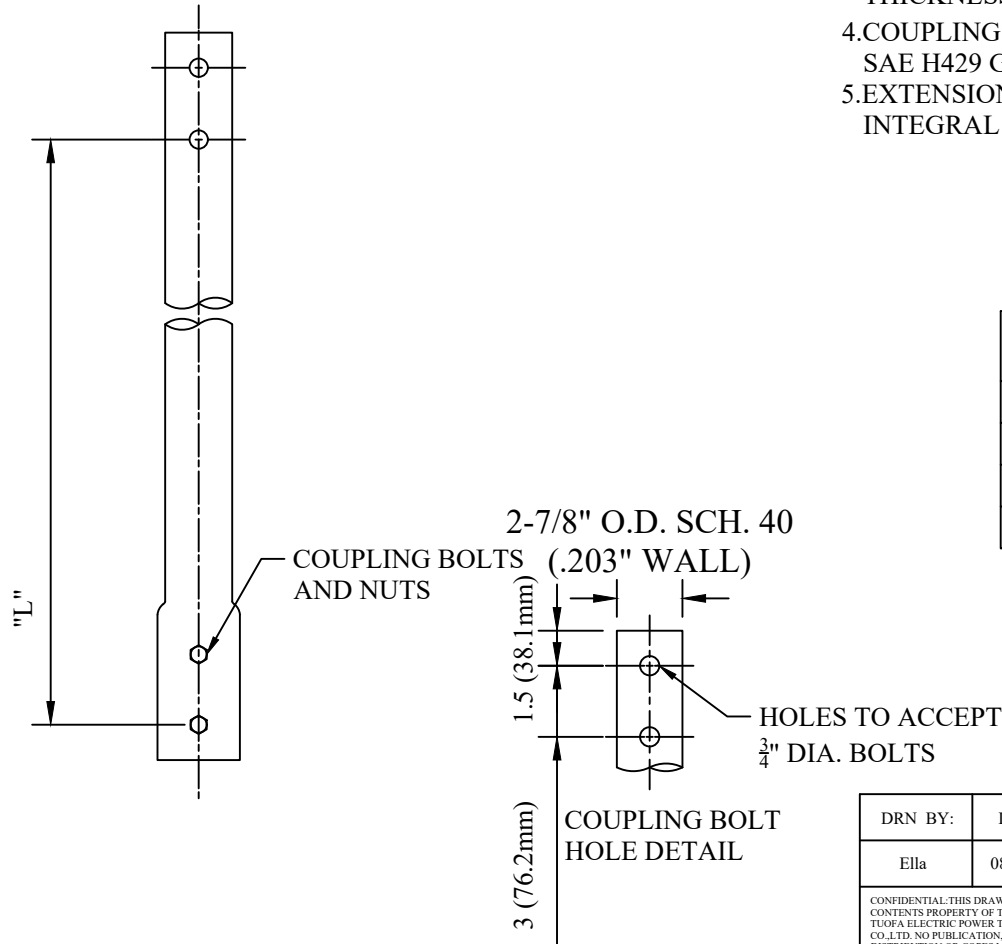

CATALOG NUMBER	"L"
03C7E2U_1	36 (914.4)
03C7E2U_2	57 (1447.8)
03C7E2U_3	78 (1981.2)
03C7E2U_4	120 (3048)

DRN BY:	DATA
Ella	08/06/17
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

ROUND SHAFT EXTENSION
 HELICAL ANCHOR



TTF POWER TECHNOLOGY CO.