
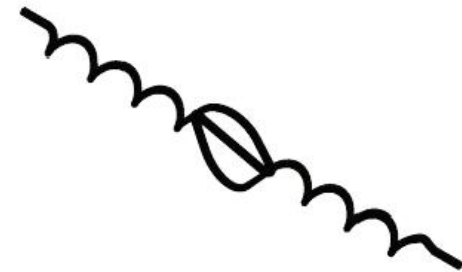


CATALOG NUMBER : 01A8E7D

CATALOG NUMBER	THROAT TYPE	CABLE DIA. RANGE MIN. - MAX.	DIM A	WEIGHT
01A8E7D_1	"C" NECK	0.407 - 0.561 [10.36 - 14.28]	2 [50.8]	.320 [.15]
01A8E7D_2	"C" NECK	0.562 - 0.717 [14.30 - 18.25]	2 [50.8]	.330 [.15]
01A8E7D_3	"C" NECK	0.718 - 0.919 [18.27 - 23.39]	2 [50.8]	.380 [.17]
01A8E7D_4	"C" NECK	0.920 - 1.125 [23.41 - 28.63]	2 [50.8]	.400 [.18]
01A8E7D_5	"F" NECK	0.250 - 0.406 [6.36 - 10.33]	2.62 [66.55]	.330 [.15]
01A8E7D_6	"F" NECK	0.407 - 0.561 [10.36 - 14.28]	2.62 [66.55]	.370 [.17]
01A8E7D_7	"F" NECK	0.562 - 0.717 [14.30 - 18.25]	2.62 [66.55]	.370 [.17]
01A8E7D_8	"F" NECK	0.718 - 0.919 [18.27 - 23.39]	2.62 [66.55]	.370 [.17]
01A8E7D_9	"F" NECK	0.920 - 1.125 [23.41 - 28.63]	2.62 [66.55]	.460 [.21]
01A8E7D_10	"F" NECK	1.260 - 1.500 [28.66 - 38.18]	2.62 [66.55]	.480 [.22]
01A8E7D_11	"J" NECK	0.562 - 0.717 [14.30 - 18.25]	3.25 [82.55]	.330 [.15]
01A8E7D_12	"J" NECK	0.920 - 1.125 [23.41 - 28.63]	3.25 [82.55]	.400 [.18]
01A8E7D_13	"K" NECK	0.407 - 0.561 [10.36 - 14.28]	3.87 [98.30]	.330 [.15]
01A8E7D_14	"K" NECK	0.562 - 0.717 [14.30 - 18.25]	3.87 [98.30]	.380 [.17]
01A8E7D_15	"K" NECK	0.920 - 1.125 [23.41 - 28.63]	3.87 [98.30]	.480 [.22]
01A8E7D_16	"K" NECK	1.130 - 1.500 [28.702 - 38.10]	3.87 [98.30]	.560 [.25]

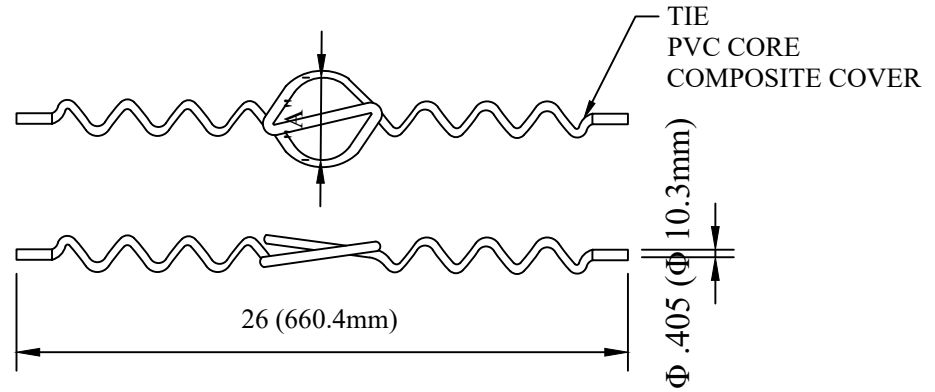

NOTES:

1. ALL DIMENSIONS FOR REFERENCE ONLY. DISTANCE IN. [MM], FORCE LBS. [kN], TORQUE IN. LBS. [N.m], & WEIGHT LBS. [KG].
2. RATINGS:  
A.NA
3. CERTIFICATIONS, SPECIFICATIONS, & STANDARDS:  
A. UV STABILIZED - MIN. 2.5% CARBON BLACK FILLED BY WEIGHT
4. SUFFIXES & VARIANT CONFIGURATION:  
A.NA

DRN BY:	DATA
Ella	09/07/17
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

SEMI-CONDUCTIVE  
TIE



TTF POWER TECHNOLOGY CO.