
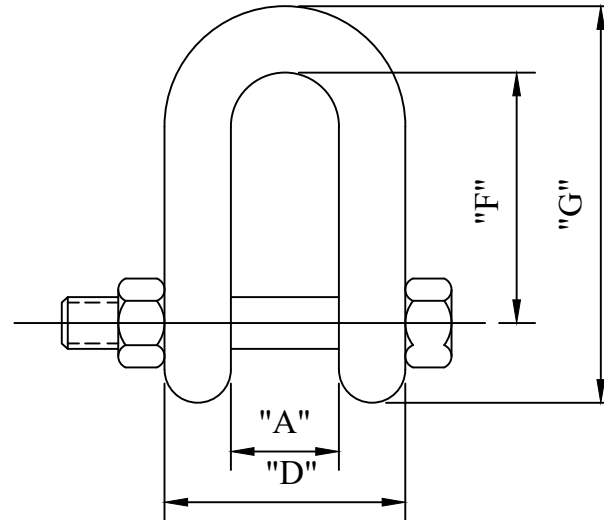


CATALOG NUMBER : 03C1K7L

NOTES:

- 1.A MINIMUM TENSILE ULTIMATE STRENGTH OF 95 KSI AND A MINIMUM IMPACT STRENGTH OF 15 FT. -LBS AT -20°F WITH CHARPY V-NOTCH TYPE A SPECIMENS.
- 2.FINISH: HOT DIP GALVANIZE PER ASTM A153(LATEST REVISION).

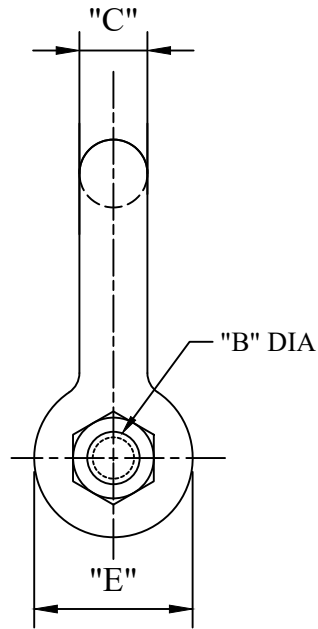

CATALOG NUMBER	"A"	"B"	"C"	"D"	"E"	"F"	"G"	WT.	BOLT DIA	GRADE
03C1K7L_1	1.81 (46.0mm)	.94 (23.9mm)	1.13 (28.7mm)	4.06 (103.1mm)	2.63 (66.8mm)	4.19 (106.4mm)	6.63 (168.4mm)	6.6 (167.6mm)	.875 (22.2mm)	B7
03C1K7L_2	2.25 (57.2mm)	1.19 (30.2mm)	1.38 (35.1mm)	5.00 (127.0mm)	3.31 (84.1mm)	5.19 (131.8mm)	8.22 (208.8mm)	12.0 (304.8mm)	1.125 (28.6mm)	B7
03C1K7L_3	2.38 (60.5mm)	1.31 (33.3mm)	1.50 (38.1mm)	5.38 (134.6mm)	3.63 (92.2mm)	5.70 (144.8mm)	9.00 (228.6mm)	16.2 (411.5mm)	1.25 (31.8mm)	B7

DRN BY:	DATA
Ella	09/07/17
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

SHACKLE
HELICAL ANCHOR



TTF POWER TECHNOLOGY CO.