


CATALOG NUMBER : 01A6E6H

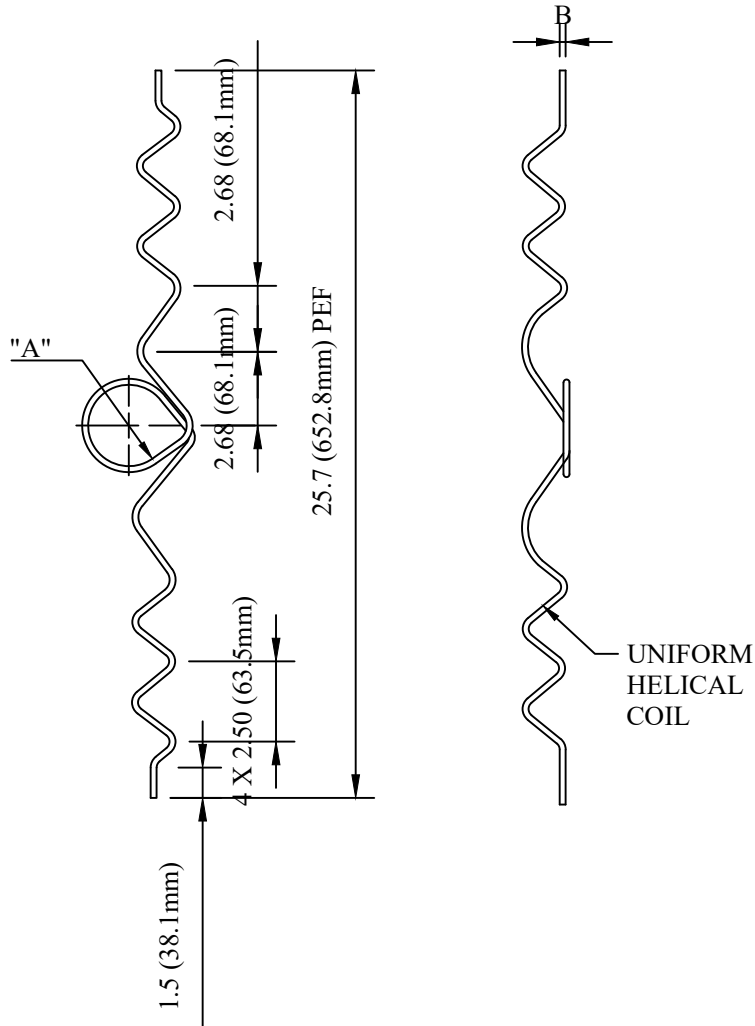

CATALOG NUMBER	CLASS	CABLE RANGE	THROAT RANGE	A	B MIN.
01A6E6H_1	55-2,3	.12 - .25	2.12 - 2.75	2.00	.405
01A6E6H_2	55-2,3	.25 - .40	2.12 - 2.75	2.00	.405
01A6E6H_3	55-2,3	.40 - .56	2.12 - 2.75	2.00	.405
01A6E6H_4	55-2,3	.56 - .72	2.12 - 2.75	2.00	.405
01A6E6H_5	55-2,3	.72 - .92	2.12 - 2.75	2.00	.405
01A6E6H_6	55-2,3	.92 - 1.13	2.12 - 2.75	2.00	.405
01A6E6H_7	55-2,3	1.13 - 1.50	2.12 - 2.75	2.00	.405
01A6E6H_8	55-4,5	.25 - .40	2.75 - 3.37	2.62	.405
01A6E6H_9	55-4,5	.40 - .56	2.75 - 3.37	2.62	.405
01A6E6H_10	55-4,5	.56 - .72	2.75 - 3.37	2.62	.405
01A6E6H_11	55-4,5	.72 - .92	2.75 - 3.37	2.62	.405
01A6E6H_12	55-4,5	.92 - 1.13	2.75 - 3.37	2.62	.405
01A6E6H_13	55-4,5	1.13 - 1.50	2.75 - 3.37	2.62	.405
01A6E6H_14	56-1,2,3	.25 - .40	3.37 - 4.00	3.25	.405
01A6E6H_15	56-1,2,3	.40 - .56	3.37 - 4.00	3.25	.405
01A6E6H_16	56-1,2,3	.56 - .72	3.37 - 4.00	3.25	.405
01A6E6H_17	56-1,2,3	.72 - .92	3.37 - 4.00	3.25	.405
01A6E6H_18	56-1,2,3	.92 - 1.13	3.37 - 4.00	3.25	.405
01A6E6H_19	56-1,2,3	1.13 - 1.50	3.37 - 4.00	3.25	.405
01A6E6H_20	56-4	.25 - .40	4.00 - 4.62	3.87	.405
01A6E6H_21	56-4	.40 - .56	4.00 - 4.62	3.87	.405
01A6E6H_22	56-4	.56 - .72	4.00 - 4.62	3.87	.405
01A6E6H_23	56-4	.72 - .92	4.00 - 4.62	3.87	.405
01A6E6H_24	56-4	.92 - 1.13	4.00 - 4.62	3.87	.405
01A6E6H_25	56-4	1.13 - 1.50	4.00 - 4.62	3.87	.405
01A6E6H_26	55-4,5	.22 - .41	2.75 - 3.37	2.62	.405

A = MANDREL DIA.  
B = ROD DIA.

DRN BY:	DATA
Ella	08/06/17
<small>CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

STRAIGHT INSULATOR  
SIDE TIE



TTF POWER TECHNOLOGY CO.