


CATALOG NUMBER : 03E1S8U

NOTES:

- 1.FINISH: HOT DIP GALVANIZE PER ASTM A153(LATEST REVISION).
- 2.LEAD AND EXTENSION SECTION LENGTHS ARE NOMINAL, EXPECT SOME MINOR VARIANCE.
- 3.CLEVIS BOLTS; 1" DIAMETER X 5" LONG HEX HEAD PER SAE J429 GRADE 2.
- 4.MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES.
- 5.ALL WELDING TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1.

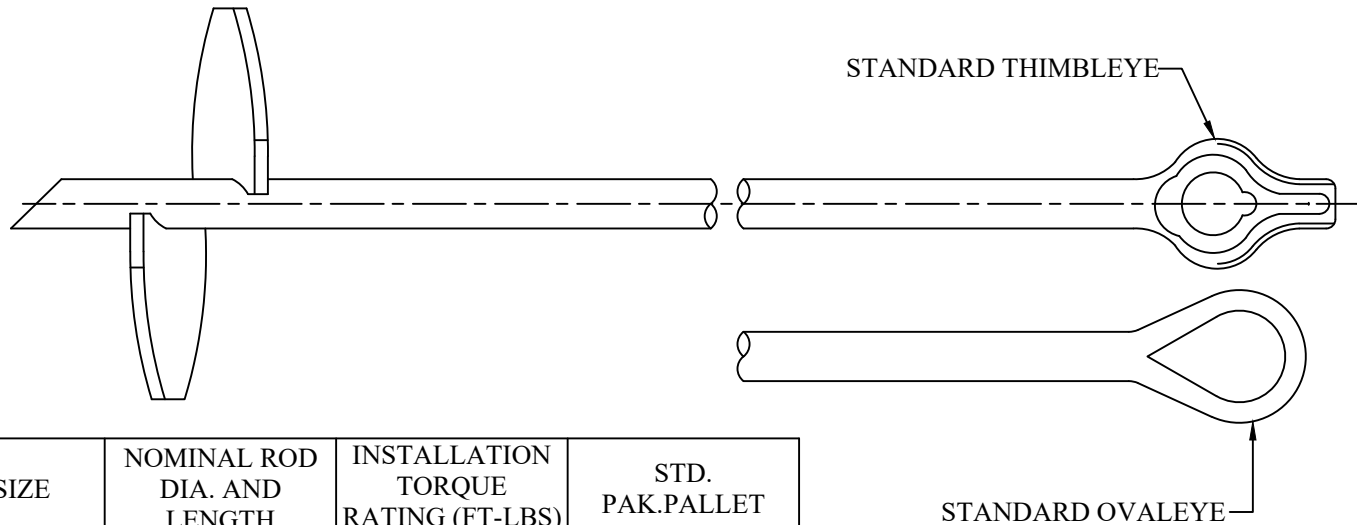

| HELIX SIZE | NOMINAL ROD DIA. AND LENGTH | INSTALLATION TORQUE RATING (FT-LBS) | STD. PAK.PALLET |
|------------|-----------------------------|-------------------------------------|-----------------|
| 8"         | 1" X 66"                    | 1000                                | 1/60            |

NOTES:

TO ORDER A THIMBLEYE ROD SIMPLY ADD "1" TO THE SUFFIX OF THE CATALOG NUMBER  
 EXAMPLE: CATALOG NO.63461.  
 TO ORDER A OVALEYE ROD SIMPLY ADD "OR" TO THE SUFFIX OF THE CATALOG NUMBER.  
 EXAMPLE: NO.816OR.

|  |          |
|--|----------|
| DRN BY:  | DATA     |
| Ella   | 07/09/16 |
| <small>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small> |          |

**NO-WRENCH HELICAL ANCHOR WITH TRIPLEYE, WEIGHT: 21.031 LB**



**TTF POWER TECHNOLOGY CO.**