


CATALOG NUMBER : 03C0A9V

TORQUE STRENGTH RATING = 40,000 FT-LB
 ULTIMATE TENSION/COMPRESSION STRENGTH = 200 KIP

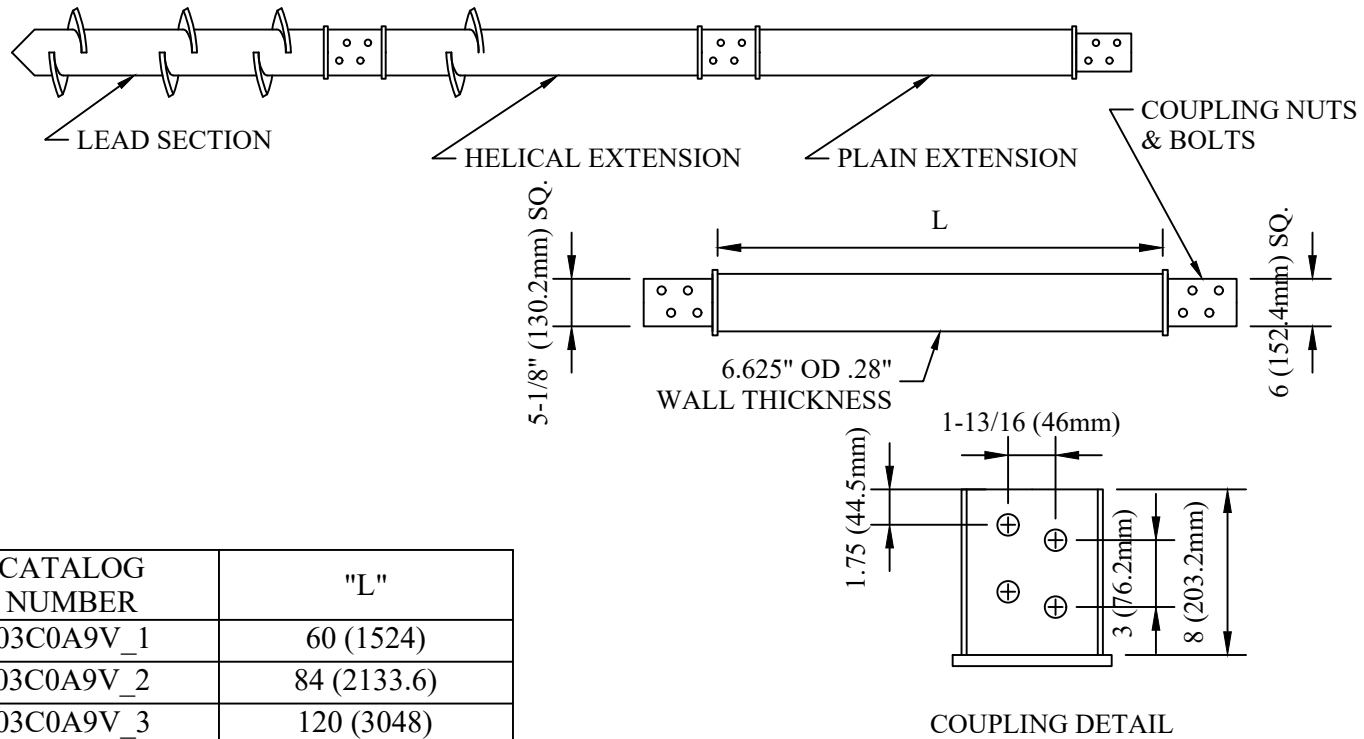

CATALOG NUMBER	"L"
03C0A9V_1	60 (1524)
03C0A9V_2	84 (2133.6)
03C0A9V_3	120 (3048)

NOTES:

1. PIPE SHAFT MATERIAL: STEEL PIPE PER ASTM A500 GRADE B.
2. BOX COUPLING MATERIAL: HOT ROLLED STEEL PLATE PER ASTM A572 GRADE 50. MINIMUM YIELD = 50KSI.
3. PLATE MATERIAL PER ASTM A656 GRADE 80 $\frac{1}{2}$ " THICK.
4. COUPLING STUD MATERIAL: PER AISI M1042, M0144, OR M1045. 1" DIA.
5. COUPLING NUT MATERIAL: PER ASTM A563.

DRN BY:	DATA
Ella	08/06/17
<small>CONFIDENTIAL. THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO., LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO., LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO., LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

ROUND SHAFT HELICAL
 PILES EXTENSION



TTF POWER TECHNOLOGY CO.