
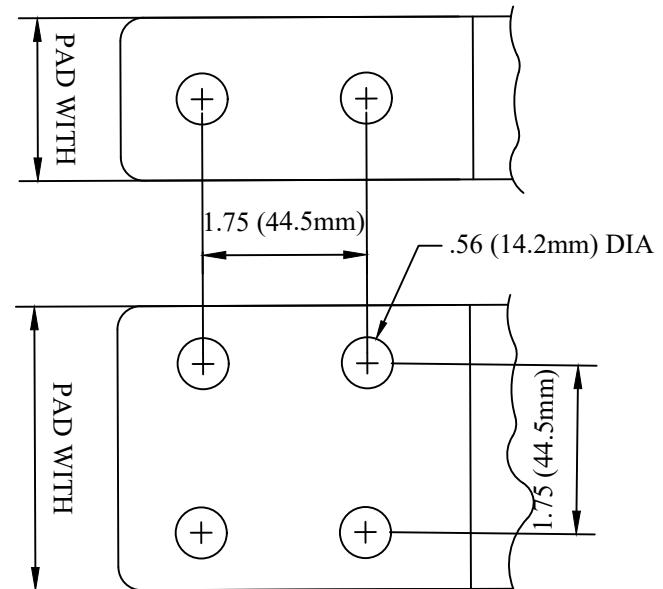
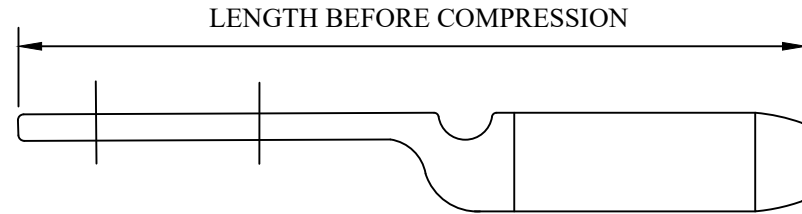


CATALOG NUMBER : 01B2D3E



NOTES:

1. MATERIAL:

TERMINAL – SEAMLESS EXTRUDED ALUMINUM ALLOY TUBE  
 HARDWARE – ALUMINUM ALLOY

DRN BY:	DATA
Ella	09/07/17

STRAIGHT COMPRESSION  
 TERMINAL

CONFIDENTIAL THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.



TTF POWER TECHNOLOGY CO.

CATALOG NUMBER : 01B2D3E

PRODUCT DATA AND CONDUCTOR SIZE						
CATALOG NUMBER	OUTSIDE DIAMETER INCHES STD COND/	AAC SIZE KCMIL	ACSR KCMIL (STR)	PAD WIDTH	LENGTH INCHES (MM)	NET WEIGHT LB (KG)
	COMPACT/TW		ACSR/TW (TYP)			
01B2D3E_1	0.595 - 0.679	300-350	266.8(26/7) - 336.4(18/1)	1.7 (44)	9.2 (234)	0.4 (.19)
	0.547 - 0.611			---		
01B2D3E_2	0.680 - 0.765	397.5-400	336.4(18/1) - 397.5(20/7)	1.7 (44)	9.8 (249)	0.6 (.27)
	0.630 - 0.695			---		
01B2D3E_3	0.766 - 0.855	450-550	397.5(24/7)-477(24/7)	2.2 (56)	10.4 (264)	0.8 (.36)
	0.702 - 0.776			---		
01B2D3E_4	0.856 - 0.950	556.5-650	477(26/7)-636(18/1)	2.2 (56)	11.4 (290)	1.1 (.49)
	0.789 - 0.858			---		
01B2D3E_5	0.950 - 1.045	700-795	636(18/1)-795(36/1)	3.0 (76)	12.1 (307)	1.5 (.68)
	0.880 - 0.930			---		
01B2D3E_6	1.026 - 1.131	795-954	795(36/1)-900(45/7)	3.0 (76)	12.7 (323)	1.8 (.81)
	0.960 - 1.010			---		
01B2D3E_7	1.140 - 1.235	1000-1113	795(30/19)-1033.5(45/7)	3.0 (76)	13.4 (340)	2.2 (.99)
	1.046 - 1.108			---		
01B2D3E_8	1.236 - 1.330	1192.5-1300	954(30/19)-1272(36/1)	3.0 (76)	14.0 (356)	2.7 (1.2)
	1.125 - 1.196			---		
01B2D3E_9	1.331 - 1.425	1351.5-1510.5	1192.5(54/19)-1351.5(54/19)	3.0 (76)	14.6 (371)	3.1 (1.4)
	1.212 - 1.300			---		
01B2D3E_10	1.426 - 1.520	1590-1700	1431(45/7)-1590(45/7)	3.0 (76)	15.9 (404)	3.9 (1.7)
	1.290 - 1.382			---		
01B2D3E_11	1.521 - 1.615	1750-1900	1590(54/19)-1868(68/7)	4.0 (102)	16.5 (419)	4.7 (2.1)
	1.385 - 1.504			---		
01B2D3E_12	1.630 - 1.805	2000-2300	2034.5(72/7)-2312(76/19)	4.0 (102)	17.8 (452)	6.1 (2.8)
	1.504 - 1.608			---		
01B2D3E_13	1.806 - 1.900	2500	2515(76/19)	4.0 (102)	18.4 (467)	7.1 (3.2)
	1.662 - 1.710			---		

DRN BY:	DATA
Ella	09/07/17
<small>CONFIDENTIAL-THIS DRAWING AND ITS CONTENTS PROPERTY OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD. TIANJIN TUOFA ELECTRIC POWER TECHNOLOGY CO.,LTD UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>	

**STRAIGHT COMPRESSION  
TERMINAL**



**TTF POWER TECHNOLOGY CO.**